


RMB-1585

Multichannel Power Amplifier



Class AB amplifier design

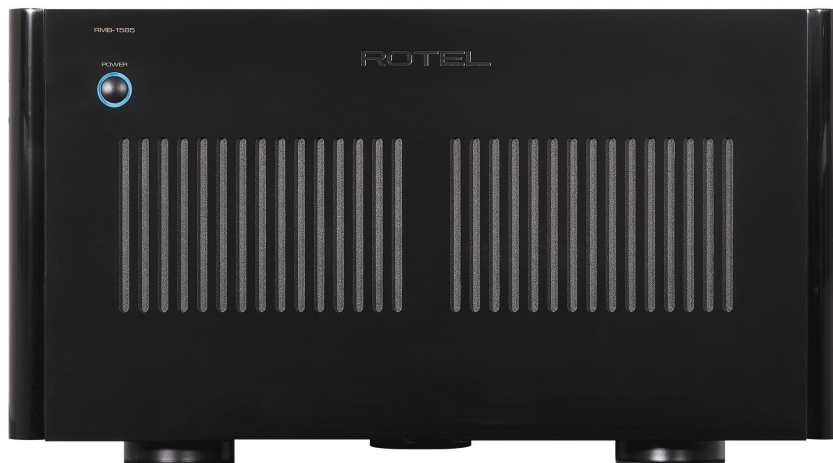

High quality slit foil capacitors made in Britain



5 x 200 Watts of robust power



Massive power supply using Dual Toroidal Transformers



Rack ears included

The RMB-1585, Rotel's new flagship theater amplifier, provides both the massive power and sonic sophistication required by the finest home theater systems.

With five channels, each capable of producing 200 continuous watts each into 8 ohm loads (a full kilowatt of output power!), the RMB-1585 masters any A/V system regardless of speaker load or room size.

But it isn't just pure output power that distinguishes the RMB-1585. It's the ability to reproduce both the dynamics of a Hollywood blockbuster and the musical nuances of acoustic instruments that sets it apart.

Where does this balance come from? It's a direct result of Rotel's celebrated Balanced Design Concept in which circuit topology and parts selection meld in the pursuit of sonic excellence.

As with all Rotel products, this performance level begins with a power supply based on Rotel-designed and -manufactured dual toroidal transformers. In addition to providing proper voltages and current to subsequent rectifiers, regulators, and capacitors, these transformers also serve as a critical first stage of filtration for incoming AC power. And the toroid shape itself tightly focuses stray emissions to avoid their potentially negative impact on sound quality.

Also in evidence is the Slit-Foil capacitor, an improved variant of a conventional storage device. The Slit-Foil is named after the many precise cuts made in the aluminum conductors. These cuts or "slits" minimize the eddy currents that reduce a conventional capacitor's ability to store and supply energy efficiently. The power supply of RMB-1585's output section benefits from eight British-made BHC Slit Foil caps, each with a capacity of 15,000 μ F. And each channel uses six individual power transistors to ensure stable power delivery to all speakers in the system even under the most demanding conditions. Dual fans provide more-than-adequate airflow for proper thermal dissipation.

These and other high quality components were carefully chosen for their significant contribution to better sound quality and then "tuned" to each other for even further aural improvements.

The RMB-1585 makes system connection easy with both single-ended inputs via RCA jacks or balanced connections via three-pin XLR connectors.

In summary, you could describe the RMB-1585 as a "brute" that provides a full kilowatt of power. Or you might regard it as an exacting conveyer of the most subtle aspects of music or a movie soundtrack. In either case, you'd be correct. You'd also be correct if you simply said that the RMB-1585 is the win-win answer for everyone seeking authoritative yet nuanced control of the speaker array of your choice.

RMB-1585

Multichannel Power Amplifier



SPECIFICATIONS

Continuous Power Output (20-20 kHz, < 0.03%, 8 ohms)	200 watts / channel 5 channel driven
Total Harmonic Distortion (20Hz-20kHz, 8 ohms)	< 0.03%
Intermodulation Distortion (60 Hz : 7 kHz, 4:1)	< 0.03%
Frequency Response (+0.5, -3dB)	10Hz - 100kHz
Damping Factor (20-20,000 Hz, 8 ohms)	260
Speaker Impedance	4 ohms minimum
Signal to Noise Ratio (IHF A network)	116 dB
Input Impedance / Sensitivity	
Unbalanced	12k Ohms / 1.9 volt
Balanced	100k Ohms / 3.8 volt
Gain	26.5 dB
Power Requirements	
U.S. version	120 Volts, 60 Hz
European version	230 Volts, 50 Hz
Power Consumption	1100 Watts
Dimensions	
Width x Height x Depth	431 x 237 x 454 mm 17 x 9 ³ / ₈ x 17 ⁷ / ₈ ins
Front Panel Height	5U / 221mm / 8 ³ / ₄ ins
Weight (net)	36kg / 79.3 lbs

All specifications are accurate at the time of printing.
Rotel reserves the right to make improvements without notice.