

 **DEPARTURES** 12:30


Departures on 6th October 2023

SCHEDULED	FLYING TO	FLIGHT NO	AIRLINE	STATUS
				<a href="#">Search Earlier</a>
14:45	HERAKLION (HER)	LS625	Jet2.Com	Departed
15:20	BELFAST CITY (BHD)	EI3689	Aer Lingus	Go to Gate 1
15:25	TENERIFE (TFS)	LS633	Jet2.Com	Wait in Lounge
15:25	PALMA (PMI)	FR9489	Ryanair	Go to Gate 3
15:25	HURGHADA (HRG)	TOM358	Tui	Wait in Lounge
15:30	DALAMAN (DLM)	LS621	Jet2.Com	Wait in Lounge
16:10	KOS (KGS)	LS659	Jet2.Com	Wait in Lounge
16:25	DALAMAN (DLM)	TOM622	Tui	Wait in Lounge
16:50	TENERIFE (TFS)	TOM7580	Tui	Departing at 17:10
16:55	THIRA (JTR)	LS663	Jet2.Com	Wait in Lounge
17:25	MALAGA (AGP)	FR4468	Ryanair	Wait in Lounge
17:25	BERGAMO (BGY)	FR1702	Ryanair	Wait in Lounge
18:10	PISA (PSA)	FR1708	Ryanair	Departing at 18:10
19:35	LIMOGES (LIG)	FR1632	Ryanair	Scheduled
20:20	DUBLIN (DUB)	FR7079	Ryanair	Scheduled
15:30	DALAMAN (DLM)	LS621	Jet2.Com	Wait in Lounge
16:10	KOS (KGS)	LS659	Jet2.Com	Wait in Lounge
16:25	DALAMAN (DLM)	TOM622	Tui	Wait in Lounge
16:50	TENERIFE (TFS)	TOM7580	Tui	Departing at 17:10

DM Series  
Digital Signage Solutions

# Introducing the latest generation of Digital Signage Displays

Hisense Digital Signage is designed to serve multiple business applications: public spaces, transportation systems, museums, stadiums, retail stores, hotels, restaurants and corporate buildings. With DM series, it delivers powerful engagement from any devices, boost business with real-time updates, data-driven insights and visually appealing content, manage and control devices at anytime from anywhere, and simplify the cable management by connecting a series of displays to a single video output.

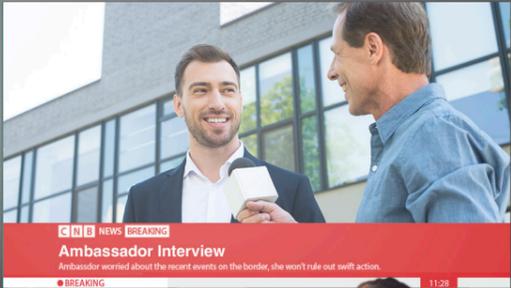

## DM Series - Highlights



### Narrow Bezel

With a narrow bezel and symmetrical design, the display can be easily integrated into any environment. All terminals face outwards, ensuring the display hangs flush against the wall which saves space and facilitates installation.



### Clean Cable Solution

The integrated cable holder hides cables and keeps the back of the display tidy and uncluttered. This reduces visual distractions that can get in the way of your viewing experience.



### Wireless Screen Sharing

Everything you need for screen sharing solutions. Screen Cast is a in house built-in screen sharing application that enables the screen sharing wirelessly and seamlessly from anywhere and from any devices.



### Build-in VisionInfo

VisionInfo is a cloud-based device management software that offers end-to-end device management and control through all devices. It is a powerful, effective and easy to use tool to control your devices at anytime from anywhere.



### Android 11

Android 11 works to keep your data safe and secure. With Android 11, you have more control over what information apps can and can't access. Devices that work better together, enhance your messaging, audio and multitasking experiences.



### Anti-glare Coating

All displays offer higher haze panels that help reduce reflections without adversely affecting the image quality. Anti-glare coatings can also improve the perceived contrast of the display.



### Smart Power

The backlight intensity can be controlled and pre-set by the system to reduce the power consumption, ENERGY STAR-certified, the display helps you protect the environment and save costs.



### Conformal Coating

Electronic components are completely protected from the environmental factors like moisture, dust, salt, chemicals, temperature changes and mechanical abrasion.





### 4K UHD

Delivers superior resolution that allows more details to be displayed on an image. The materials, the textures, the skin texture and the backgrounds: everything is richer and more realistic. 4K UHD provides four times the resolution of Full HD (1080p), with a resolution of 3840 x 2160 pixels. This higher pixel density results in sharper and more detailed images and videos, which can significantly enhance the viewing experience.


### Anti Glare Coating

All DM Series Offers higher haze panel that helps with reflections without notably affecting the image quality.

By reducing glare, anti-glare coatings enhance the visibility of the display's content. This is crucial for digital signage, as it ensures that passersby and viewers can clearly see and read the information, advertisements, or messages being displayed. Improved visibility can lead to better communication and engagement.


### High Brightness

In outdoor settings or indoor environments with lots of ambient light, such as shopping malls, airports, or storefronts with large windows, high-brightness displays are essential. The DM Series displays deliver 500 nits brightness so they can overcome the challenges posed by direct sunlight or strong indoor lighting, ensuring that the content remains visible and legible even in bright conditions.

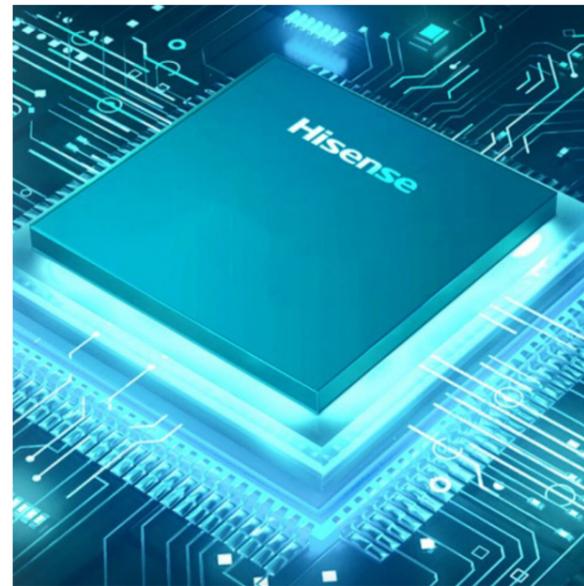

### Android 11 - A Safer and Enhanced Experience

Android 11 works to keep your data safe and secure. With Android 11, you have more control over what information apps can and can't access. Devices that work better together, enhance your messaging, audio and multitasking experiences.

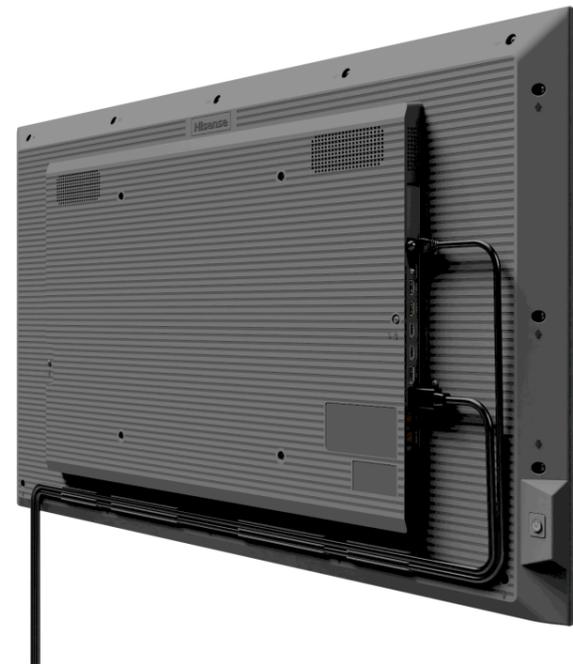

### Clean Cable Solutions

The integrated cable holder hides cables and keeps the back of the display tidy and uncluttered. This reduces visual distractions that can get in the way of your viewing experience.



### Narrow Bezel

The narrow bezel on the DM series digital signage display enhances the visual appeal, functionality, and effectiveness of the display in commercial applications. It allows for more seamless content presentation, improved aesthetics, and greater flexibility in designing engaging displays.

For presentations, conferences, or digital signage setups that require multiple screens, a narrow bezel ensures that the transition between different screens is seamless. It helps maintain the continuity of content across multiple displays, making it easier for viewers to follow presentations or messages.



### Wireless Screen Sharing with Quad Split Screen

With Hisense DM series, you can eliminate the need for physical cables, adapters, and complex setup processes. Users can quickly and easily connect their devices (such as laptops, smartphones, or tablets) to the DM series digital signage displays without dealing with cable management, making it a user-friendly option.


Software casting support quad split screen enhancing the usability and versatility our signage displays, making them more interactive, engaging and convenient for both presenters and viewers.



## Why Choose VisionInfo for the DM Series


### Flexible and Scalable Solutions

VisionInfo from Hisense is our cloud-based digital signage software which is flexible, cost-effective, and infinitely scalable for users. VisionInfo includes a comprehensive CMS solution and advanced remote display management features. It provides users the freedom to edit and publish content while ensuring it looks great across all displays in a system. It is a powerful, effective and easy to use tool to manage content and control your displays at anytime from anywhere.

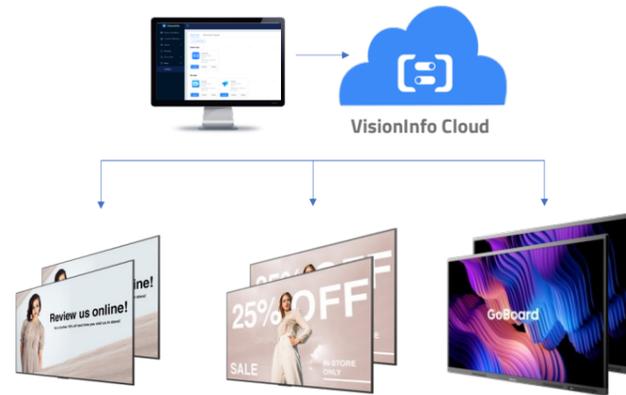

### Key Features

- Web browser editor UI
- Drag-and-drop visual editor
- Supports website integration
- Supports live streams
- Supports Office documents and PDF's
- Supports Widgets
- 4K resolution playback
- Offline content playback
- Program preview and publish approval
- Advanced program scheduler
- Custom template layouts
- Playback statistics

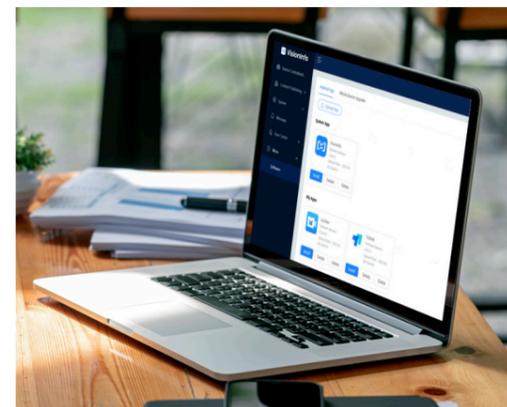

## The Complete Solution

1

### Intelligent Content Management

Effortlessly manage, customize and deliver your message with our intuitive CMS platform. Streamline content creation and engage your audience with our powerful, user-friendly platform.



Content Creation



Dynamic Scheduling



Content Publishing

2

### Enterprise-Grade Device Management

Empower your business with remote monitoring and control of displays on an installation. Safeguard your digital content with the robust security features of VisionInfo. Protect your displays and marketing content from cyber threats, ensure data privacy, and enjoy total peace of mind.



Remote Monitoring



Complete Control



Error Notifications

3

### Enhanced Data Management

Unlock the power of data with our advanced analytics and reporting feature within VisionInfo. Gain valuable insights, make data-driven decisions, and maximize the performance of your content.



Routine Automation



Data Analysis



Visual Reporting



### Mobile Device Management

- View the status of remote displays - online/offline, CPU and memory running status
- Real-time display control - power off, screen sleep/wake up, reboot, switch signal source, screen lock/unlock, USB disable/enable
- Remote desktop real-time monitoring
- Scheduled tasks to control displays - power On/off, screen sleep/wake up
- Remote software management - APP installation and uninstallation, remote OS Upgrade
- Display usage statistics

## Specifications

Model	32DM66D	43DM66D	50DM66D/50DM66E	55DM66D	65DM66D	75DM66D	86DM66D
<b>Backlight Type</b>	DLED	DLED	DLED	DLED	DLED	DLED	DLED
<b>Type</b>	ADS	ADS	50DM66D - VA 50DM66E - IPS	ADS	ADS	ADS	ADS
<b>Size</b>	32"	43"	50"	55"	65"	75"	86"
<b>Resolution</b>	1920 x 1080	3840 x 2160	3840 x 2160	3840 x 2160	3840 x 2160	3840 x 2160	3840 x 2160
<b>Refresh rate</b>	60Hz	60Hz	60Hz	60Hz	60Hz	60Hz	60Hz
<b>Color Depth</b>	16.7M (8 Bits)	1.07G (8 Bits+FRC)	1.07G (8 Bits+FRC)	1.07G (8 Bits+FRC)	1.07G (8 Bits+FRC)	1.07G (8 Bits+FRC)	1.07G (8 Bits+FRC)
<b>Brightness(Typ.)</b>	500 nits	500 nits	500 nits	500 nits	500 nits	500 nits	500 nits
<b>Contrast Ratio(Typ.)</b>	1200:1	1200:1	5000:1 / 1200:1	1200:1	1200:1	1200:1	1200:1
<b>Response Time(Typ.)</b>	8ms	8ms	8ms	8ms	8ms	8ms	8ms
<b>Viewing Angle(Min.)</b>	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°
<b>Color Gamut(Typ.)</b>	72% NTSC	72% NTSC	DCI-P3 92% / 72% NTSC	72% NTSC	72% NTSC	72% NTSC	72% NTSC
<b>Haze</b>	25%	25%	25%	25%	25%	25%	25%
<b>Orientation</b>	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait
<b>Lifetime</b>	up to 50,000 hrs	up to 50,000 hrs	up to 50,000 hrs	up to 50,000 hrs	up to 50,000 hrs	up to 50,000 hrs	up to 50,000 hrs
<b>Operation Hours</b>	7Day x 24Hour	7Day x 24Hour	7Day x 24Hour	7Day x 24Hour	7Day x 24Hour	7Day x 24Hour	7Day x 24Hour

## System

<b>Operating System</b>	Android 11	Android 11	Android 11	Android 11	Android 11	Android 11	Android 11
<b>Processor CPU</b>	ARM Cortex-A55 Quad core	ARM Cortex-A55 Quad core	ARM Cortex-A55 Quad core	ARM Cortex-A55 Quad core	ARM Cortex-A55 Quad core	ARM Cortex-A55 Quad core	ARM Cortex-A55 Quad core
<b>Processor GPU</b>	Mali-G52	Mali-G52	Mali-G52	Mali-G52	Mali-G52	Mali-G52	Mali-G52
<b>Memory</b>	3G DDR4	3G DDR4	3G DDR4	3G DDR4	3G DDR4	3G DDR4	3G DDR4
<b>Storage</b>	32G EMMC	32G EMMC	32G EMMC	32G EMMC	32G EMMC	32G EMMC	32G EMMC
<b>Language</b>	Simplified Chinese, English, French, German, Polish, Spanish, Russian, Italian, Finnish, Norwegian, Swedish, Hebrew, Arabic, Thai, Malay, Indonesian						

## Connectivity

<b>Wi-Fi</b>	2.4/5.0GHz dual, 802.11a/b/g/n/ac							
<b>Bluetooth</b>	BT5.1							
<b>Input</b>	HDMI(2.0) x 2 DP(1.2a) x 1 USB2.0(A) x 1 USB3.0(A) x 1 RS232(RJ45) x 1 LAN(RJ45) x 1	HDMI(2.0) x 2 DP(1.2a) x 1 USB2.0(A) x 1 USB3.0(A) x 1 RS232(RJ45) x 1 LAN(RJ45) x 1	HDMI(2.0) x 2 DP(1.2a) x 1 USB2.0(A) x 1 USB3.0(A) x 1 RS232(RJ45) x 1 LAN(RJ45) x 1	HDMI(2.0) x 2 DP(1.2a) x 1 USB2.0(A) x 1 USB3.0(A) x 1 RS232(RJ45) x 1 LAN(RJ45) x 1	HDMI(2.0) x 2 DP(1.2a) x 1 USB2.0(A) x 1 USB3.0(A) x 1 RS232(RJ45) x 1 LAN(RJ45) x 1	HDMI(2.0) x 2 DP(1.2a) x 1 USB2.0(A) x 1 USB3.0(A) x 1 RS232(RJ45) x 1 LAN(RJ45) x 1	HDMI(2.0) x 2 DP(1.2a) x 1 USB2.0(A) x 1 USB3.0(A) x 1 RS232(RJ45) x 1 LAN(RJ45) x 1	HDMI(2.0) x 2 DP(1.2a) x 1 USB2.0(A) x 1 USB3.0(A) x 1 RS232(RJ45) x 1 LAN(RJ45) x 1
<b>Output</b>	HDMI x 1 Audio(3.5mm) x 1 RS232(RJ45) x 1	HDMI x 1 Audio(3.5mm) x 1 RS232(RJ45) x 1	HDMI(2.0) x 1 Audio(3.5mm) x 1 RS232(RJ45) x 1	HDMI x 1 Audio(3.5mm) x 1 RS232(RJ45) x 1	HDMI x 1 Audio(3.5mm) x 1 RS232(RJ45) x 1	HDMI x 1 Audio(3.5mm) x 1 RS232(RJ45) x 1	HDMI x 1 Audio(3.5mm) x 1 RS232(RJ45) x 1	HDMI x 1 Audio(3.5mm) x 1 RS232(RJ45) x 1

## Physical

<b>Bezel Color</b>	Black	Black	Black	Black	Black	Black	Black
<b>Set Dimension (WxHxD)</b>	726 x 420.6 x 61.5mm 25.6 x 16.6 x 2.4inch	970.4 x 557.5 x 62.8mm 38.20 x 21.9 x 2.5inch	1124.1 x 644.2 x 62.5mm 44.26 x 25.36 x 2.46inch	1239.7 x 710.2 x 63.3mm 48.8 x 28 x 2.5inch	1458.9 x 832.8 x 63.7mm 57.4 x 32.8 x 2.5inch	1675.3 x 955.1 x 63.7mm 66 x 37.6 x 2.5inch	1926.6 x 1095.5 x 64.2mm 75.9 x 43.1 x 2.5inch
<b>Bezel width(T/L/R/B)</b>	10.1mm(T/L/R), 10.3mm(B)	10.1mm(T/L/R), 10.3mm(B)	10.4mm(T/L/R), 11.1mm(B)	10.1mm(T/L/R), 10.6mm(B)	10.4mm(T/L/R), 10.9mm(B)	10.3mm(T/L/R), 10.8mm(B)	10.3mm(T/L/R), 10.8mm(B)
<b>Net Weight</b>	4.6kg / 10.1lbs	8.5kg / 18.7lbs	11kg / 24.3lbs	13.9kg / 30.6lbs	21.5kg / 47.4lbs	29kg / 63.9lbs	38.2kg / 84.2lbs
<b>Packing Dimension (WxHxD)</b>	820 x 512 x 126mm 32.3 x 20.2 x 5inch	1092 x 663 x 145mm 43 x 26.1 x 5.7inch	1251 x 777 x 154mm 49.2 x 30.6 x 6.1inch	1387 x 838 x 159mm 54.6 x 33 x 6.3inch	1629 x 997 x 160mm 64.1 x 39.0 x 6.3inch	1850 x 1150 x 211mm 72.8 x 45.3 x 8.3inch	2117 x 1298 x 269mm 83.3 x 51.1 x 10.6inch
<b>Gross Weight</b>	6.5kg / 14.33lbs	12.5kg / 27.56lbs	16.2kg / 35.7lbs	19.5kg / 43lbs	30kg / 66.15lbs	41.6kg / 91.7lbs	59.5kg / 131.2lbs
<b>VESA Mount</b>	200mm x 200mm	300mm x 300mm	300mm x 300mm	300mm x 300mm	400mm x 400mm	600mm x 400mm	600mm x 400mm

\* Product specifications may vary per region, and specifications are subject to change. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively.

Learn More: [www.hisense-b2b.com](http://www.hisense-b2b.com) | Contact Us: [sales@hisense-b2b.com](mailto:sales@hisense-b2b.com)

LinkedIn: @Hisense B2B Europe | @Hisense B2B USA | @Hisense B2B MENA | @Hisense B2B Indonesia | @Hisense B2B South Africa

**Hisense** COMMERCIAL DISPLAY

## Power

Model	32DM66D	43DM66D	50DM66D/50DM66E	55DM66D	65DM66D	75DM66D	86DM66D
<b>Power Supply</b>	AC 100~240V (50/60Hz)						
<b>Power Consumption (Typ.)</b>	52W	80W	100W	115W	145W	175W	200W
<b>Power Consumption (Max.)</b>	60W	120W	150W	190W	210W	265W	325W
<b>Standby Consumption</b>	<0.5W (Standby Mode)						

## Speaker

<b>Built in speaker</b>	10W x 2						
-------------------------	---------	---------	---------	---------	---------	---------	---------

## Environment

<b>Operating Temperature</b>	0°~40°C						
<b>Operating Humidity</b>	10%~80% Non-Condensing						

## What's in the box

<b>Standard</b>	Quick Setup Guide
	Warranty Card
	Power Cord
	Remote Control
	Battery (AAA) x 2
	RS232 Converter Cable

## Certification

<b>Standard Certification</b>	CCC/CB/CE/FCC/ETUvus/UKCA/CEC/ERP
<b>Safety</b>	62368-1
<b>Environment</b>	Energy Star 8.0
<b>IP Rating</b>	IP5X




Learn More: [www.hisense-b2b.com](http://www.hisense-b2b.com) | Contact Us: [sales@hisense-b2b.com](mailto:sales@hisense-b2b.com)

LinkedIn: @Hisense B2B Europe | @Hisense B2B USA | @Hisense B2B MENA | @Hisense B2B Indonesia | @Hisense B2B South Africa


**Hisense** COMMERCIAL DISPLAY

# Dimensions


**32"** 726 x 420.6 x 61.5mm / 25.6 x 16.6 x 2.4inch  
4.6kg / 10.1lbs

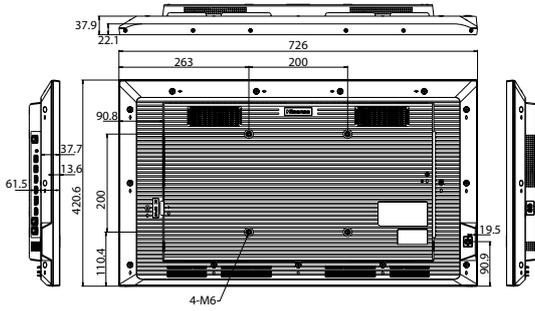


**43"** 970.4 x 557.5 x 62.8mm / 38.20 x 21.9 x 2.5inch  
8.5kg / 18.7lbs

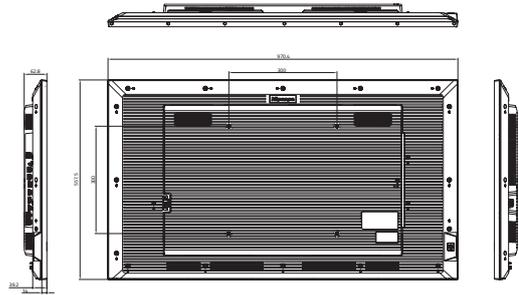


**50"** 1124.1 x 644.3 x 62.5mm / 44.26 x 25.36 x 2.46inch  
11kg / 24.3lbs

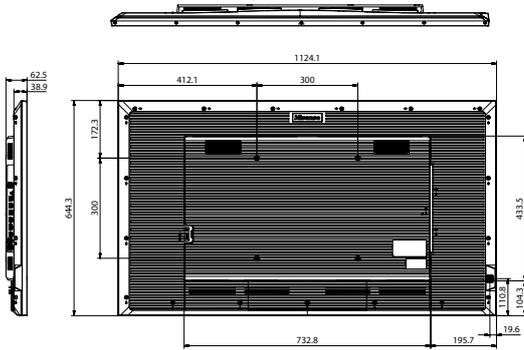


**55"** 1239.7 x 710.2 x 63.3mm / 48.8 x 28 x 2.5inch  
13.9kg / 30.6lbs

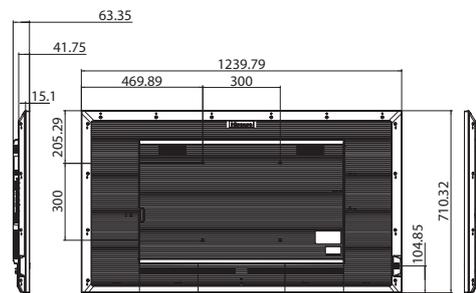

**65"** 1458.9 x 832.8 x 63.7mm / 57.4 x 32.8 x 2.5inch  
21.5kg / 47.4lbs

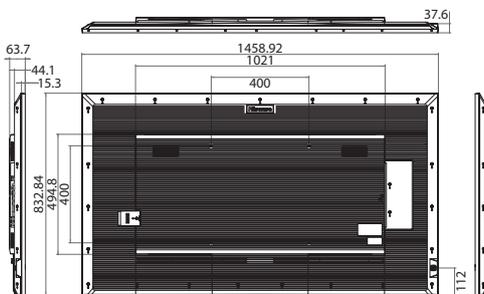

**75"** 1675.3 x 955.1 x 63.7mm / 66 x 37.6 x 2.5inch  
29kg / 63.9lbs

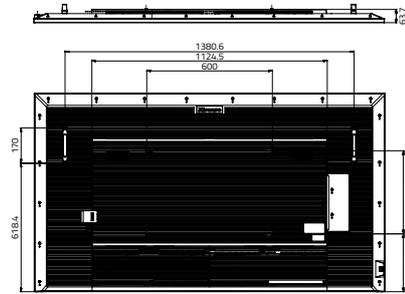

**86"** 1926.6 x 1095.5 x 64.2mm / 75.9 x 43.1 x 2.5inch  
38.2kg / 84.2lbs

