

KX-VD170 Product Information

HD Communication Camera

KX-VD170 Full HD



*Requires ceiling suspension sold separately.


Product Feature

Pan, tilt and zoom operations of the dedicated camera installed at the own site or other sites are available with the HDVC remote controller. You can preset the direction and zoom magnification in advance for smooth operation. Up to twelve preset own site (non-communicating) registrations are possible.

Pan

Camera lens rotates $\pm 130^\circ$


in horizontal direction.



Tilt

Camera lens rotates +90°/−25°

in vertical direction.




Zoom

Optical zoom enlarges images up to 12 times.



You can choose the camera based on the size of the room.

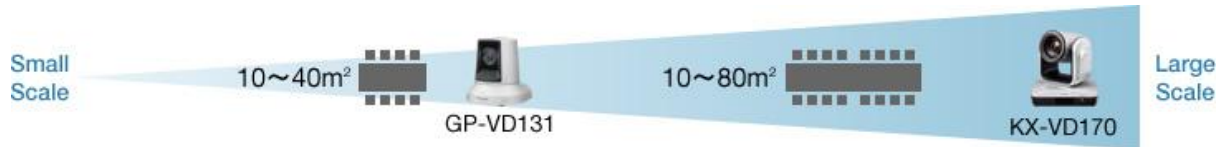

[User's Guides](#)

Specifications

Effective Pixels	1920 x 1080p
Pan / Tilt	Pan: ±130°, Tilt: +90°-25
Zoom (optical/digital)	12x / 10x
Angle of view (optical zoom)	Horizontal angle of view 72.5 ° (Wide end) - 6.3° (Tele end) F1.8 (Wide end) - F2.8 (Tele end)
Presets	12 positions
Connection Cable	HDMI
Dimensions (width x depth x height)	Approx. 180 mm x approx. 145 mm x approx. 184 mm
Weight	Approx. 1.6 kg
Power Consumption	Power supply voltage: 12 VDC±10% (with AC adaptor attached) Consumption current: 1.2 A

Operating Temperature	0 °C to 40 °C
Operating Humidity	20 % to 90 % (non-condensing)

- The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.
- This product (or technology) is subject to the Foreign Exchange and Foreign Trade Act. When exporting (or providing technology for) this product, please follow the necessary procedures for export approval based on the Foreign Exchange and Foreign Trade Act.