


Key Features

- SuperEco+ Mode
- Customized user modes
- 5V/1.5A USB power for wireless dongle
- Dual HDMI inputs
- SuperColor™ technology



Product Description

The ViewSonic PG701WU is a high brightness WUXGA projector with 1920 x 1200 resolution and a 16:10 aspect ratio. The 3,500 ANSI lumens of brightness allows the PG701WU to project images in full depth and detail, even in brightly lit medium-sized spaces, such as meeting rooms or classrooms. Its new SuperEco+ mode extends the projector's lamp life of up to 20,000 hours, effectively reducing lamp replacement and maintenance costs. In addition, the dual HDMI ports allow you flexibly connect to your laptop, PC, and other high definition devices for presentation files or multimedia applications. Lastly, the USB Type A with power supply provides connectivity to a USB dongle for a wireless presentation.

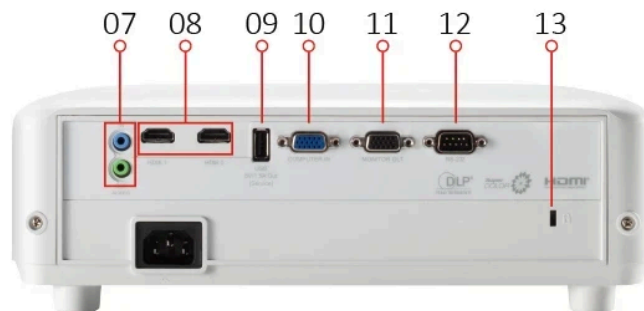

- | | |
|--------------------|---------------------------|
| 1. Keypad | 8. Dual HDMI |
| 2. LED indicator | 9. USB Type A |
| 3. Power Key | 10. Computer In |
| 4. Zoom/Focus | 11. Monitor Out |
| 5. Front IR | 12. RS232 |
| 6. Projection Lens | 13. Kensington® Lock Slot |

SPECIFICATION

Projection System:	0.48" WUXGA
Native Resolution:	1920x1200
Brightness:	3500 (ANSI Lumens)
Contrast Ratio with SuperEco Mode:	12000:1
Display Color:	1.07 Billion Colors
Light Source Type:	Lamp
Light Source Life (hours) with Normal Mode:	5000
Light Source Life (hours) with SuperEco Mode:	20000
Lamp Watt:	203W
Lens:	F=2.0~2.05, f=15.843-17.445mm
Projection Offset:	100%+/-6%
Throw Ratio:	1.5-1.65
Optical Zoom:	1.1x
Digital Zoom:	0.8x-2.0x
Image Size:	30"-300"
Throw Distance:	0.97m-10.67m (100"@3.23m)
Keystone:	+/- 40° (V)
Audible Noise (Normal):	31dB
Audible Noise (Eco):	27dB
Input Lag:	16ms
Resolution Support:	VGA(640 x 480) to WUXGA_RB(1920 x 1200) *RB-Reduced Blanking
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Horizontal Frequency:	15K-102KHz
Vertical Scan Rate:	23-120Hz

INPUT

Computer in (share with component):	1
HDMI:	2 (HDMI 1.4/ HDCP 1.4)
Audio-in (3.5mm):	1

OUTPUT

Monitor out:	1
Audio-out (3.5mm):	1
Speaker:	2W
USB Type A (Power):	1 (5V/1.5A)

CONTROL

RS232 (DB 9-pin male):	1
USB Type A (Services):	1 (share with USB A Output)

OTHERS

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz (AC in)
Power Consumption:	Normal: 300W Standby: <0.5W
Operating Temperature:	0~40°C
Carton:	Brown
Net Weight:	2.57kg
Gross Weight:	3.73kg
Dimensions (WxDxH) with Adjustment Foot:	312x222x108mm
Packing Dimensions:	415x168x297mm
OSD Language:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Greek, Total 23 languages
User Guide Language:	English, S-Chinese, T-Chinese, Indonesian, Finnish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Arabic, Czech, Thai, Vietnamese, Total 20 languages

STANDARD ACCESSORY

Power Cord:	1
VGA Cable:	1
Remote Control:	1
QSG:	Yes
Warranty:	*Warranty offered may differ from market to market

OPTIONAL ACCESSORY

Lamp/Light Source:	RLC-119
Wall/Ceiling Mount:	PJ-WMK-007
Carry Bag:	PJ-CASE-008