



PROJECTOR LS750WU


Key Features

- 5,000 ANSI Lumens offering bright images in any environment
- 2nd generation Laser Phosphor technology with 20,000 hours lifespan
- 360° projection and 1.3x optical zoom for flexible installation
- Cost-effective compact size
- Throw ratio match for a hassle-free equipment upgrade



Product Description

The ViewSonic LS750WU is a 5,000 ANSI Lumens WUXGA laser projector for installation. Adopting the 2nd generation laser phosphor technology, it offers high and consistent brightness for a reliable light source life of 20,000 hours. 1.3x optical zoom and 360° projection make for satisfying flexibility. In addition, the compact size and throw ratio match for a hassle-free equipment upgrade, ensuring the desired cost-effectiveness. The LS750WU serves as a reliable projector to ensure your installations are smooth and sound, especially ideal for medium-to-large meeting/training rooms and public displays.

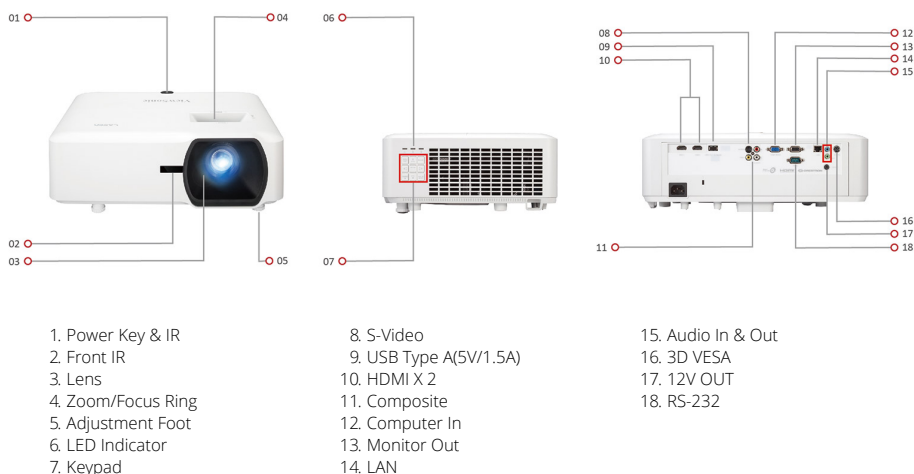

Visit Us www.viewsonic.com

SPECIFICATION

Projection System:	0.48" WUXGA
Native Resolution:	1920x1200
DMD Type:	DC3
Brightness:	5000 ANSI Lumens
Contrast Ratio:	3000000:1
Display Colour:	1.07 Billion Colours
Light Source Type:	Laser Phosphor system
Light Source Life (Normal):	up to 20000
Lamp Watt:	Nichia 67W x2
Lens:	F=1.94-2.06, f=12-15.6mm
Projection Offset:	100% +/-5%
Throw Ratio:	1.13-1.47
Optical Zoom:	1.3X
Digital Zoom:	0.8x-2.0x
Image Size:	30"-300"
Throw Distance:	0.73-9.50m (100"@2.43m)
Keystone:	H: +/-40° , V: +/-40°
Audible Noise (Normal):	35dB
Audible Noise (Eco):	28dB
Input Lag:	16ms
Resolution Support:	VGA(640 x 480) to WUXGA(1920 x 1200)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibility:	NTSC, PAL, SECAM
Horizontal Frequency:	15K-102KHz
Vertical Scan Rate:	23-120Hz

INPUT

Computer in (share with component):	1
Composite:	1
S-Video:	1
HDMI:	2 (HDMI 1.4a/HDCP1.4 x2)
Audio-in (3.5mm):	1
Audio-in (RCA R/L):	1
3D VESA (Sync):	1
RJ45 Input:	1 (LAN control)

OUTPUT

Monitor out:	1
Audio out (3.5mm):	1
Speaker:	10W x2
USB Type A (Power):	1 (5V/ 1.5A) (share with service)
12V Trigger (3.5mm):	1 (3.5mm)

CONTROL

RS232 (DB 9-pin male):	1
RJ45:	1

OTHERS

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz (AC in)
Power Consumption:	Normal: 430W Standby: <0.5W
Operating Temperature:	0~40°C
Net Weight:	5.9kg
Dimensions (WxDxH) with Adjustment Foot:	405x305x145mm

OSD Language:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Greek, total 23 languages
---------------	---

STANDARD ACCESSORY

Power Cord:	1
VGA Cable:	1
Remote Control:	1 (w/ laser pointer)
QSG:	1

OPTIONAL ACCESSORY