



aktiv10




Level up with aktiv™ the fluid head built for speed.

When you have just one chance to capture the perfect shot, mount, level and lock the revolutionary aktiv™ fluid head in seconds.

Sachtler's unique SpeedLevel™ and SpeedSwap™ technologies deliver the fastest way to place and position your camera; adjust the level in an instant without ever taking your eye off the action; get closer to the ground than ever before for extreme low-angle shots or swap between a tripod, slider, or hand held without missing a beat. Capture the widest range of shots in the shortest time with aktiv™.

- **Level and lock your head in an instant without missing a second of action.**
Unique SpeedLevel™ technology.
- **Visible from any height or angle - day or night.**
Innovative PrismBubble.
- **Capture extreme low angle shots right down to the ground.**
Innovative streamlined mounting system.
- **Switch between tripod and slider in seconds.**
Revolutionary SpeedSwap™ system.
- **Create moving stories, whatever the weather.**
Performance tested to the extreme.

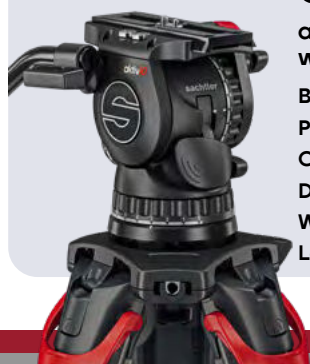

aktiv10 S2072S

aktiv™10 fluid head
with SpeedLevel™ technology

Bowl size: 100 mm with SpeedSwap™ base

Payload Range: 0 - 12 kg / 0 - 26.5 lb

Counterbalance steps: 15+0

Drag setting: 7+0

Weight: 2.9 kg / 6.4 lb

Level: Illuminated PrismBubble

Camera fitting: Sideload plate S

Sliding range: 120 mm / 4.7 in

Tilt range: +90° to -70°

Temperature range:

-40°C to +60°C / -40°F to +140°F





Built for Speed.

Level up and lock your head in an instant.

Unique SpeedLevel™ technology.

Never miss the shot. aktiv™ fluid heads feature revolutionary SpeedLevel™ technology. Release, level, and lock your head tightly into the perfect position without missing a second of action.



Visible from any height or angle - day or night.

Innovative PrismBubble.

Clear confirmation that the camera is level comes from the illuminated PrismBubble visible from any height or angle – day or night.



Capture extreme low-angle shots right down to the ground.

Innovative streamlined mounting system.

Go lower than ever. aktiv™ and flowtech® combine to provide a flexible one tripod solution delivering the widest height range. With no bowl clamp required, aktiv™ heads allow flowtech® tripods to go flat to the ground for the perfect low-angle shot.



Switch between tripod and slider in seconds.

Revolutionary SpeedSwap™ system.

Stay fast for ultimate creativity. aktiv™ fluid heads feature the unique SpeedSwap™ system, allowing lightning-fast camera swaps from a tripod to a slider without missing a beat. The perfect camera movement is just a SpeedSwap™ away.



aktiv™



**System aktiv10
flowtech100 GS**
S2072S-FTGS



**System aktiv10
flowtech100 MS**
S2072S-FTMS



**System aktiv10
flowtech100**
S2072S-FT

| Spreader type | Ground spreader | Mid-level spreader | No spreader |
|--------------------------------------|------------------------------|------------------------------|---------------------------|
| Bowl | 100 mm with SpeedSwap™ | 100 mm with SpeedSwap™ | 100 mm with SpeedSwap™ |
| Payload range | 0 - 12 kg / 0 - 26.5 lb | 0 - 12 kg / 0 - 26.5 lb | 0 - 12 kg / 0 - 26.5 lb |
| Counterbalance steps | 15+0 | 15+0 | 15+0 |
| Drag setting | 7+0 | 7+0 | 7+0 |
| Sliding range | 120 mm / 4.6 in | 120 mm / 4.6 in | 120 mm / 4.6 in |
| Tilt range | +90° to -70° | +90° to -70° | +90° to -70° |
| Camera fitting | Sideload | Sideload | Sideload |
| System weight | 6.8 kg / 15 lb | 6.9 kg / 15.2 lb | 6.3 kg / 13.9 lb |
| Height range with spreader | 60 - 176 cm / 23.6 - 69.3 in | 71 - 172 cm / 27.9 - 67.7 in | N/A |
| Height range without spreader | 23 - 170 cm / 9 - 66.9 in | 23 - 170 cm / 9 - 66.9 in | 23 - 170 cm / 9 - 66.9 in |
| Transport length | 87 cm / 34.3 in | 87 cm / 34.3 in | 87 cm / 34.3 in |
| Tripod stages | 2 | 2 | 2 |
| Tripod material | Carbon fibre | Carbon fibre | Carbon fibre |

Combine the world's fastest tripod and the fluid head built for speed to record every second of action without missing a beat. aktiv flowtech systems are the perfect one tripod solution to capture the widest range of shots in the shortest time including extreme low-angle shots, closer to the ground than ever.