

37" 3000 NITS HIGH BRIGHTNESS BAR TYPE LCD MODEL DS371BT4

The DS371BT4 is a 37.5 inch high brightness stretched professional LCD. With a stretched 32:9 aspect ratio, the DS371BT4 is designed for special applications where height is limited.

A brightness rating of 3000 nits produces a daylight viewable image for high ambient light installations. A local dimming backlight provides incredible, high contrast picture quality and low power consumption.

Key Features

- 3000 nits Brightness
- Integrated Android Media Player
- LED Backlit
- Blackening Defect Free in Direct Sunlight

32.9


- 1920 x 540 Resolution
- 5.6 mm / 11.9 mm Bezel Width

Screen image simulated.



BRIGH

37" 3000 NITS HIGH BRIGHTNESS BAR TYPE LCD MODEL DS371BT4

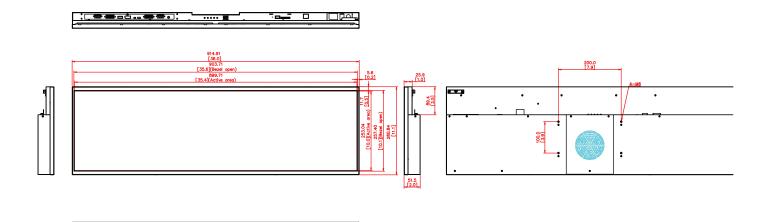

PANEL

LCD Panel Type
Native Resolution
Backlight
Brightness
Default Color Temperature
Contrast Ratio
Color Depth
Response Time
Viewing Angle
Light Life Time
Blackening Defect Free
Panel Surface

POWER

Power Supply Rated Voltage Power On Mode Power Saving Mode

MECHANICAL SPECS

Bezel Width (T/B/L/R) Cabinet Color Dimension (LxHxD, w/o stand) Weight (set/package) VESA Mounting (dimension) Orientation

USER INTERFACE

Language Daisy Chain Proof of Image Retention Dimming Control (DCR) Built-in Video Wall Support ID Setting for Daisy Chain On/Off Scheduling Ambient Light Sensor Total Turn-on time Internal Temperature Sensor Network Control OSD Menu Rotation 37.5 inches IPS LCD 1920 x 540 (32:9) LED 3000 nit D65 (6500 K) 4,000:1 10 bits 16 ms (typ) 178° / 178° 50,000 hrs (typ.) Up to 110°C (230°F) AR, Haze 25%, 3H

Internal 100 V ~ 240 V, 50 Hz / 60 Hz 95 W (typ), 145 W (max) (TBC) < 1 W

5.6/ 5.6/ 11.9/ 11.9mm
Black
914.9 x 280.8 x 51.5 mm
9 kg / 12.5kg
200 x 100 mm
Portrait / Landscape

English DVI, RS-232 Yes Yes Up to 15x15 Yes Yes Yes Yes Yes RS-232(IN/Out), RJ45 Yes

I/O PORTS (TBC)

DVI-D	In (x1), Out (x1)
Display Port	In (x1)
HDMI	ln (x1)
RS-232	In (x1), Out (x1)
RJ-45	ln (x1)
Audio	In (x1), Out (x1)
USB	USB2.0 for Internal Player*

ENVIRONMENT

Operating Temperature	0° C ~ 40° C
Storage Temperature	-20° C ~ 60° C
Humidity	10% ~ 80% RH Non-condensing

INTERNAL PLAYER

Processor	ARM Cortex-A9 1.6 GHz, Quad-Core CPU
On chip cache memory	L2: 512KB
Clock speed	1.6GHz
Main memory interface	1GB DDR3/3L (1600MHz)
Graphics	600M ARM Mali400MP4,2D/3D graphic engine, support OpenGL ES1.1/2.0, Open
Storage (FDM)	8GB NAND Flash(2GB occupied by o/s, 6GB available depending on total capacity
Multimedia	H.264 encoder/decoder, MPEG-1/2/4, H.263, H.264 MVC, AVS, VC-1, VP8/6, RV
IO ports	USB 2.0, SD slot
Operating system	Yes

