



DS SERIES

DS652LR5

65" 4,000 nit High Brightness Digital Signage

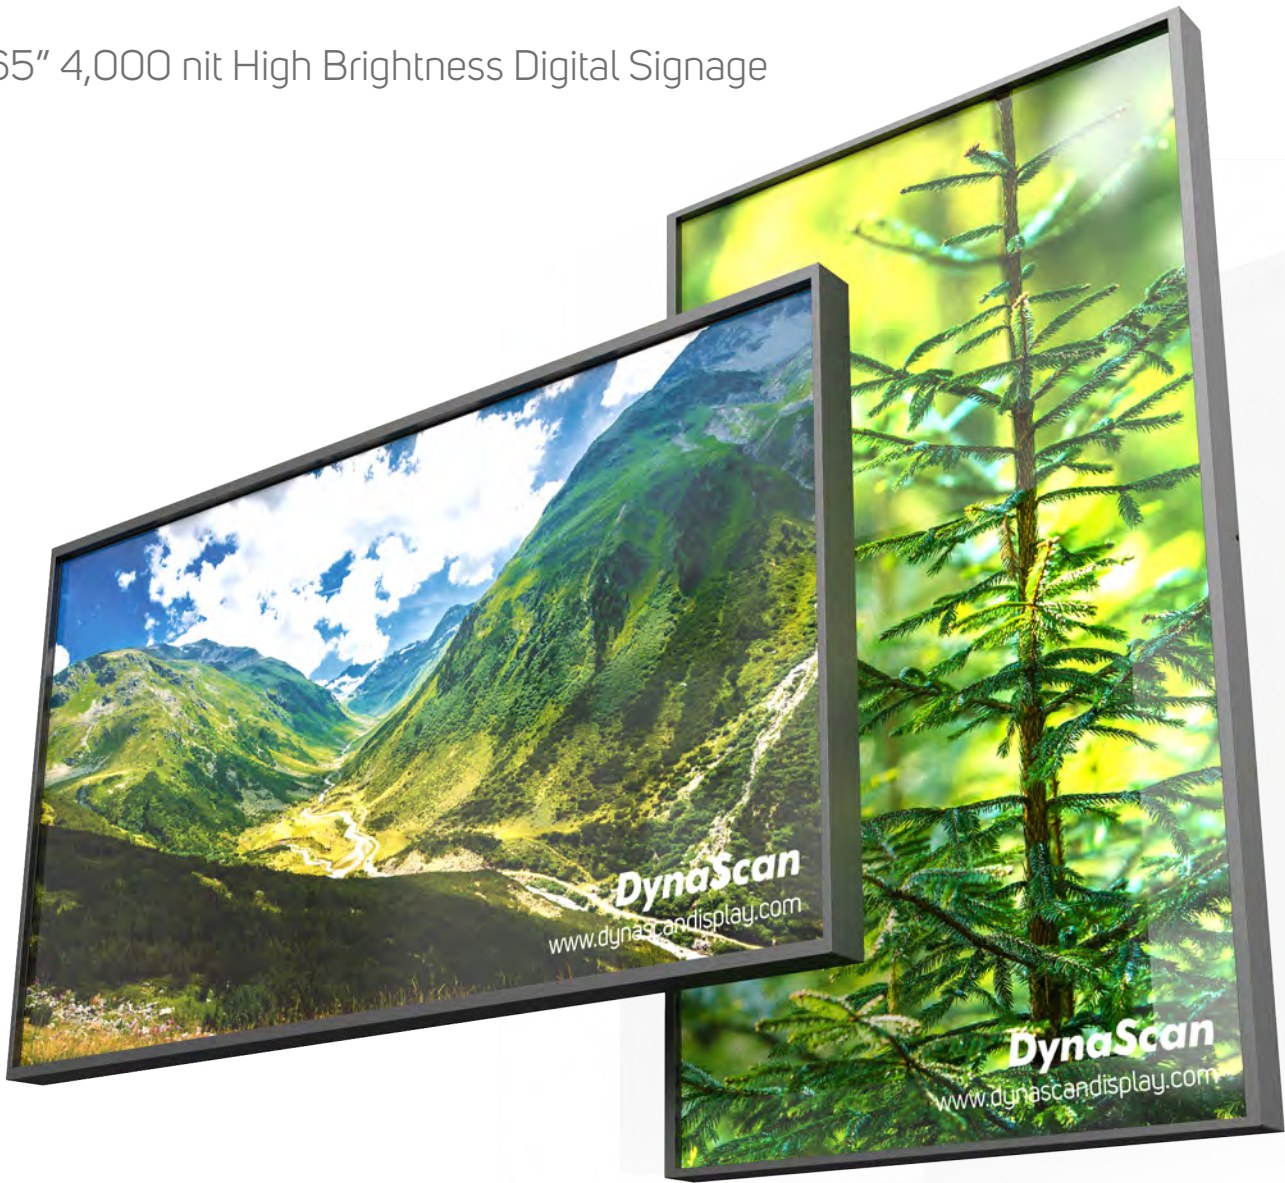


SUNLIGHT
VIEWABLE IMAGE




FULL HD
RESOLUTION



LED BACKLIT WITH
LOCAL DIMMING



THERMAL
MANAGEMENT



TRUECOLOR™
CALIBRATED

FOR MORE INFORMATION

For more information about DynaScan, visit our site at www.dynascandisplay.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.




DynaScan

SPECIFICATION

MODEL	DS652LR5		
PANEL	LCD Panel Size	64.53 inches LCD	
	Native Resolution	1920 x 1080	
	Backlight	LED	
	Default Color Temperature	D65 (6500 K)	
	Brightness	4000 nits	
	Color Depth	10 bits	
	Contrast Ratio	3000 : 1	
	Response Time (Typ.)	10 ms	
	Viewing Angle	178° / 178°	
	Light Lifetime (Typ.)	50,000 hrs	
POWER	Blackening Defect Free	Up to 110°C (230°F)	
	Panel Surface	AG Haze 1%, 3H	
	Power Supply	Internal	
	Rated Voltage	100-240V ~ 50/60Hz	
	Power On Mode (Typ./ Max.)	510 W / 740 W	
	Power Saving Mode	< 1 W	
	AC out	< 100 W	
	Bezel Width (T/B/L/R)	18.0 / 18.01 / 11.9 / 11.9 mm	
	Cabinet Color	Black	
	Monitor Dimension (LxHxD)	1457.0 x 844.0 x 102.0 mm	
MECHANICAL SPECS	Package Weight	52.5 kg	
	Orientation	Portrait / Landscape	
	VESA Mounting (LxH)	400 x 400 mm, 600 x 400 mm	
	Carring Handles	Yes	
	Language	English	
	Built-in Video Wall Support	Up to 15x15	
	Support SNMP (Up to V3.0)	Yes	
	Dimming Control	Yes	
	Proof of Image Retention	Yes	
	Ambient Light Sensor	Yes	
USER INTERFACE	Power On/Off Scheduling	Yes	
	Internal Temperature Sensor	Yes	
	OSD Menu Rotation	Yes	
	INPUT	DVI-D	x1
		Display Port	x1
		Audio	x1
	OUTPUT	DVI-D	x1
		Audio	x1
	EXTERNAL CONTROL	RS-232	In x1, Out x1
		RJ-45	x1 (LAN)
ENVIRONMENT	Operating Temperature	0° C ~ 45° C	
	Storage Temperature	-20° C ~ 60° C	
CERTIFICATION	Humidity	10% ~ 80% RH Non-condensing	
	CE / FCC / RoHS		

DIMENSIONS

Unit: mm [inch]

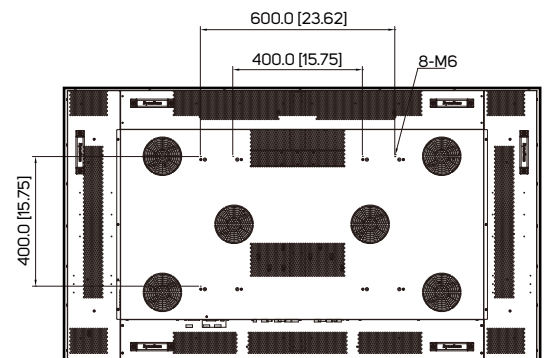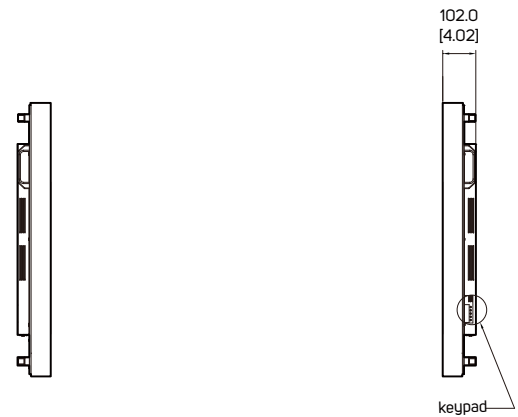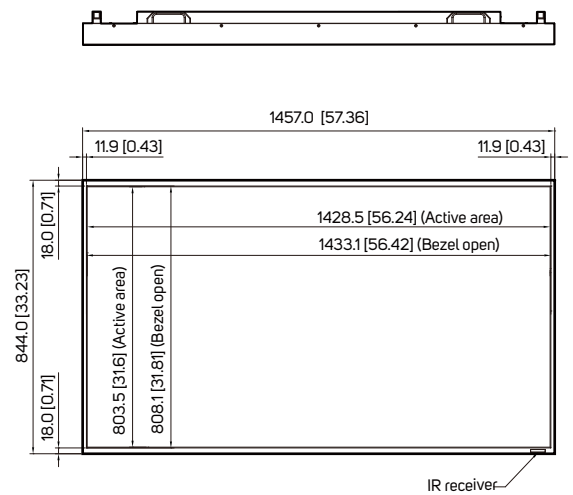

INTERFACE

