


## Key Features

- 5,200 ANSI Lumens offering bright images in any environment
- Up to a 300" ultra-large screen with a lower cost-per-inch
- Supports a 21:9 aspect ratio, ideal for Microsoft Teams Rooms
- Installation flexibility: V lens shift, 1.6x optical zoom, and H/V keystone correction
- 3rd generation laser phosphor technology with a lifespan up to 30,000 hours



## Product Description

The LSC520WU is a lamp-free, high-brightness projector designed for commercial, educational, and public spaces. Utilizing 3rd generation laser phosphor technology, this projector delivers 5,200 ANSI Lumens of brightness for up to 30,000 hours and can project an ultra-large screen up to 300" in WUXGA resolution. Ideal for modern workplaces, its 21:9 aspect ratio is optimized for Microsoft Teams Rooms applications, enhancing collaborative environments. Equipped with features like V lens shift, 1.6x optical zoom, H/V keystone correction, and 360° projection capabilities, the LSC520WU offers flexible setup possibilities. Additionally, its comprehensive LAN control ensures seamless integration into existing device management networks.

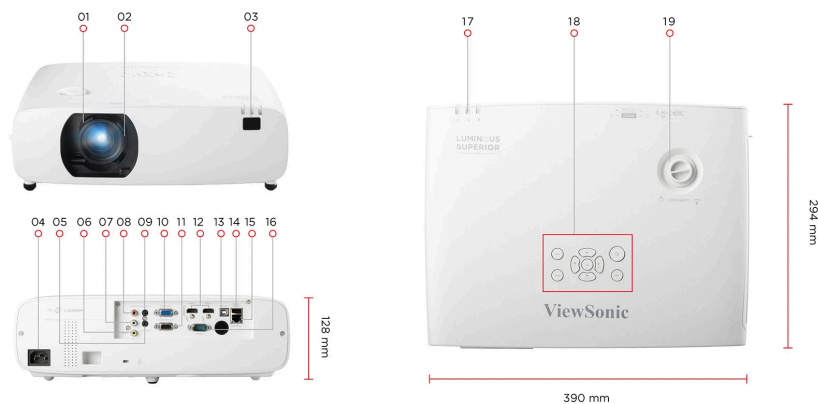

1. Zoom Ring
2. Focus Ring
3. Front IR
4. AC In
5. Audio In
6. Video
7. Audio In (L)

8. Audio In (R)
9. Audio Out
10. Computer
11. Monitor Out
12. HDMI x2
13. Service
14. USB-A (5W/1.5A)

15. RJ45
16. RS232
17. LED Indicator
18. Keypad
19. Lens Shift Control Knob

**Visit Us**

[www.viewsonic.com](http://www.viewsonic.com)

**SPECIFICATION**

Projection System:	3LCD (3x0.64" with MLA)
Native Resolution:	1920x1200
Brightness:	5200 (ANSI Lumens)
Brightness (Center Lumens):	6000
Contrast Ratio:	3000000:1
Display Color:	1.07 Billion Colors
Light Source Type:	Laser Phosphor
Light Source Life (hours) with Normal Mode:	20000
Light Source Life (hours) with SuperEco Mode:	30000 (Eco)
Lens:	F=1.58-2.02, f=15.3-24.6mm
Projection Offset:	0%+/-5%
Throw Ratio:	1.08-1.76
Optical Zoom:	1.6X
Digital Zoom:	1.0x-4.0x
Image Size:	30"-300"
Throw Distance:	0.70-11.37m (100"@2.33m)
Keystone:	H: +/-30°, V: +/-30°
Lens Shift V. Range:	+45%, 0%
Audible Noise (Normal):	35dB
Audible Noise (Eco):	26dB
Input Lag:	60ms
Resolution Support:	VGA(640 x 480) to 4K(3840 x 2160@30Hz)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 2160p@30Hz
Horizontal Frequency:	15K-100KHz
Vertical Scan Rate:	23-85Hz

**INPUT**

Computer in (share with component):	1
Composite:	1
HDMI:	2 (HDMI 1.4/ HDCP 1.4)
Audio-in (3.5mm):	1
Audio-in (RCA R/L):	1
USB Type A:	1 (5V/1.5A)

**OUTPUT**

Monitor out:	1
Audio-out (3.5mm):	1
Speaker:	16W
USB Type A (Power):	1 (USB2.0 - 5V/1.5A, share with USB A Input)

**CONTROL**

RS232 (DB 9-pin male):	1
RJ45 (LAN control):	1
USB Type B (Services):	1

**OTHERS**

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz (AC in)
Power Consumption:	Normal: 230W Standby: <0.5W
Operating Temperature:	0~40°C
Carton:	Brown
Net Weight:	5.2kg
Gross Weight:	7.23kg
Dimensions (WxDxH) with Adjustment Foot:	390x294x128mm
Packing Dimensions:	492x443x239mm
OSD Language:	English, German, French, Italian, Spanish, Polish, Swedish, Dutch, Portugese, Japanese, Simplified Chinese, Traditional Chinese, Korean, Russian, Turkish, Finnish, Norwegian, Danish, Indonesian, Hungarian, Czech, Kazak, Vietnamese, Thai, Farsi, total 25 languages
User Guide Language:	English, S-Chinese, T-Chinese, Indonesian, Finish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Arabic, Czech, Thai, Vietnamese, total 20 languages

**STANDARD ACCESSORY**

Power Cord:	1
Remote Control:	1
QSG:	Yes
Air Filter:	Yes
Warranty Card:	Yes (CN Only)

**OPTIONAL ACCESSORY**

Air Filter:	Yes
Wall/Ceiling Mount:	PJ-WMK-007