

# DALI PHANTOM K-80 & K-60

The new DALI PHANTOM K-series are in-ceiling speakers that build on the virtues of the well-known PHANTOM E-series – with better sound and even more flexibility:

## **BETTER BASS**

Wood fibre cones and an improved magnet motor system for a better low end response.

## **ADJUSTABLE SOUND**

The dome tweeter can be tilted for optimum sound at the desired listening position. The integrated voicing options allow the sound to be adjusted to fit every situation.

## **NEW CUSTOM BACK-CAN**


The new proprietary retrofittable back-can fits through the speaker mounting hole, making installation extremely easy.

## **NEW GRILLE DESIGN**

A fresh grille design for a new look. Interchangeable with E-series grilles.



IN ADMIRATION OF MUSIC

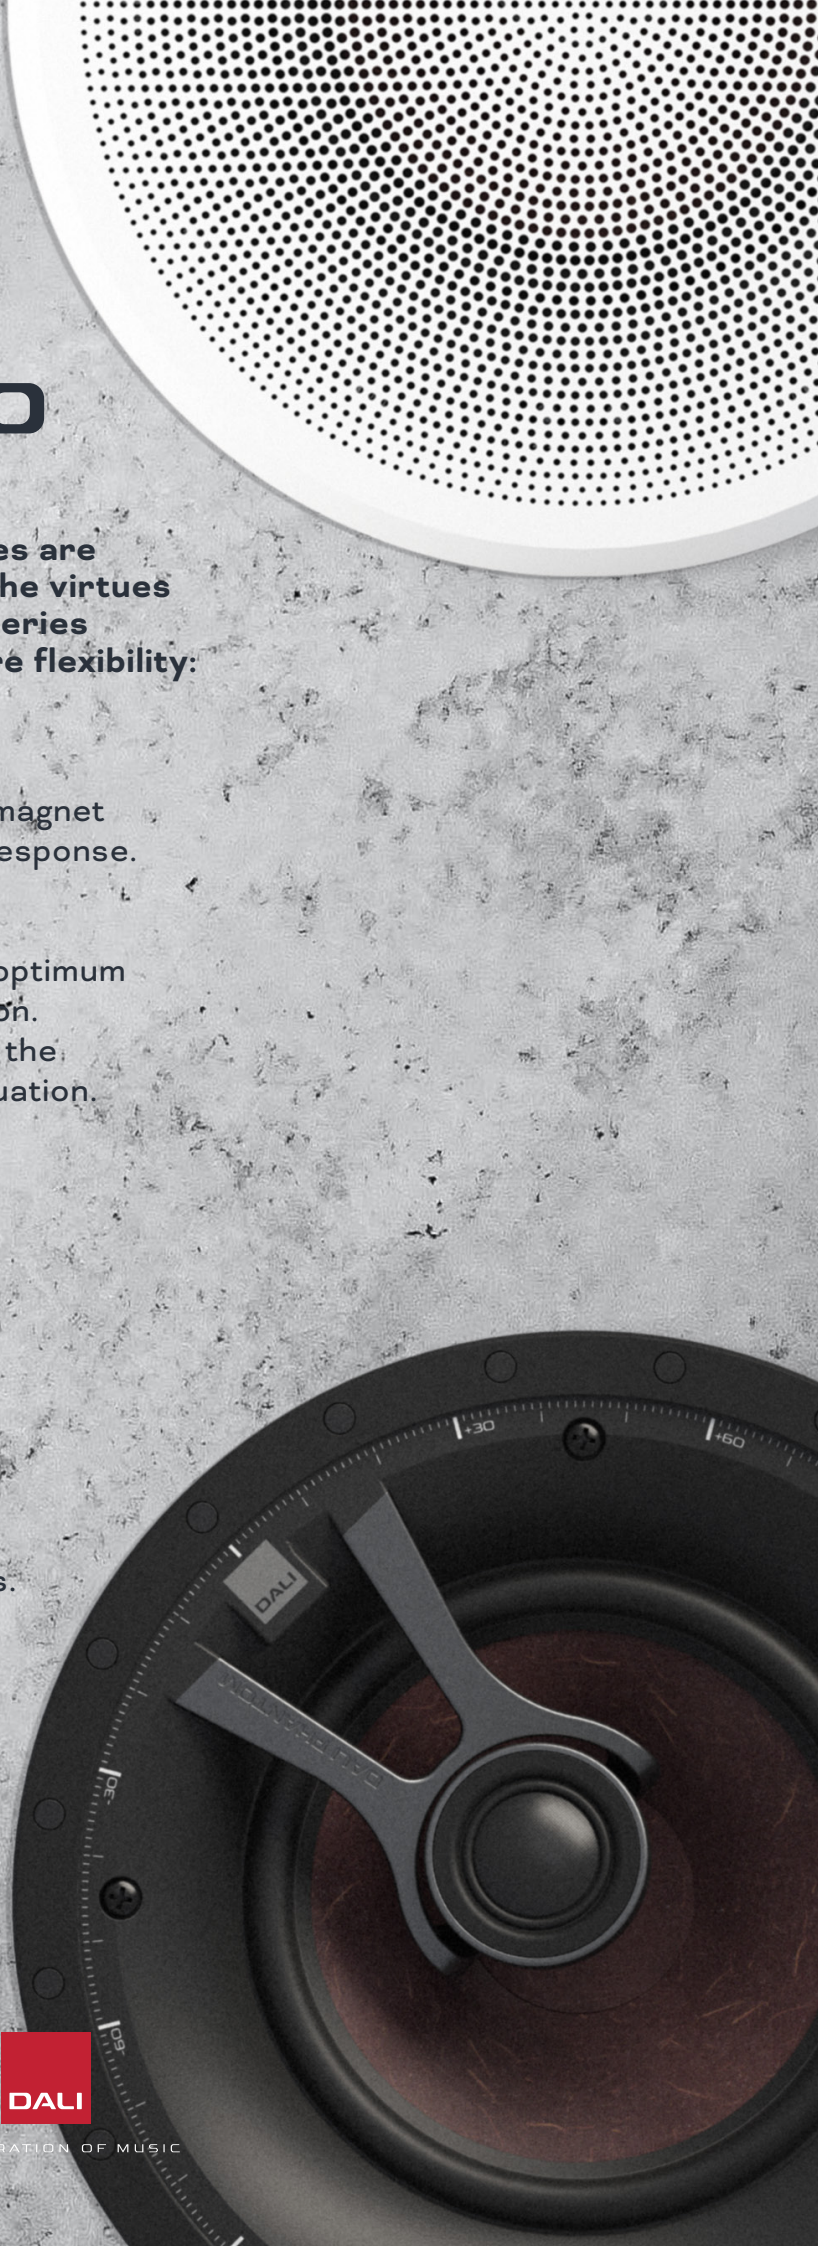



## K-80 SPECIFICATIONS

Frequency Range +/- 3 dB	<b>48 - 25,000 Hz</b>
Sensitivity (2.83V/1m)	<b>87 dB</b>
Nominal Impedance	<b>6 ohm</b>
Maximum SPL	<b>107 dB</b>
Crossover Frequency	<b>3,000 Hz</b>
Recommended Amplifier Power	<b>50 - 200</b>
High Frequency Driver	<b>1 x 28 mm soft dome</b>
Low Frequency Driver/ Mid-range Driver(s)	<b>1 x 8"</b>
Connection Input	<b>2 x Single wire</b>
Dimensions (Ø x D)	<b>Ø 30.1 x 11.4 cm Ø 11.9 x 4.5 in</b>
Cut-out Dimensions (Ø)	<b>Ø 26,1 cm Ø 10.3 inches</b>
Weight [kg/lbs]	<b>3.19/7.10</b>
Finish	<b>White</b>
Accessories	<b>Cut-out template Front grille</b>



## K-60 SPECIFICATIONS

Frequency Range +/- 3 dB	<b>51 - 25,000 Hz</b>
Sensitivity (2.83V/1m)	<b>87 dB</b>
Nominal Impedance	<b>6 ohm</b>
Maximum SPL	<b>105 dB</b>
Crossover Frequency	<b>3,000 Hz</b>
Recommended Amplifier Power	<b>40 - 150</b>
High Frequency Driver	<b>1 x 28 mm soft dome</b>
Low Frequency Driver/ Mid-range Driver(s)	<b>1 x 6½"</b>
Connection Input	<b>2 x Single wire</b>
Dimensions (Ø x D)	<b>Ø 26.5 x 10.2 cm Ø 10.4 x 4.0 in</b>
Cut-out Dimensions (Ø)	<b>Ø 22.3 cm / Ø 8.8 in</b>
Weight [kg/lbs]	<b>2.0/4.41</b>
Finish	<b>White</b>
Accessories	<b>Cut-out template Front grille</b>