



NIO222

Network I/O mixing breakout box Dante™/AES67 - 2 x Mic/Line inputs + 2 x Balanced Line outputs

Highlights:

- All-in-one mixing & sound processing
- 4 x 4 channels Dante™ & AES67
- 2 x Mic/Line inputs
- 2 x Balanced Line outputs
- Integrated Bluetooth receiver (Version 4.2)
- Compatible with BAE100 extender kit for a higher gain and reception range
- S-box™ modular multifunctional enclosure

Product information:

NIO series are Dante™/AES67 network I/O mixing breakout boxes featuring terminal block input and output audio and Bluetooth connections. The audio inputs can be switched between line-level and microphone-level audio signals and phantom power (+48 V DC) can be applied to the input connectors for powering condenser microphones. Various further integrated DSP functions such as EQ, automatic gain control, and other device settings can be configured through the AUDAC Touch™. The IP-based communication makes it future-proof while also being backwards compatible with many existing products. The NIO series is compatible with any PoE network-based installation thanks to the limited PoE power consumption. The networked I/O expanders are compatible with MBS1xx setup box installation accessories which allow them to be mounted under a desk, in a closet, on the wall, on top of a dropped ceiling or a 19" equipment rack.

Applications:

- Retail
- Education
- Corporate
- Hotels
- Bars & Restaurants
- Sporting facilities



Certification:



Properties:



Additional Inputs:





System specifications:

Inputs	Type	Mic/Line
	Connector	2 x 3-pin Euro Terminal Block (Pitch - 3.81 mm)
	Type	Bluetooth receiver (Version 4.2)
		Dante™/AES67 (4 channels)
		RJ45 (With indicator LED's)
	Impedance	10 kΩ Unbalanced
		20 kΩ balanced
	Configurable Settings	Gain
		AGC
		Maximum Volume
	Noise Gate	
	WaveTune™	
Outputs	Type	2 x Balanced Line
		Dante™/AES67 (4 channels)
	Connector	2 x 3-pin Euro Terminal Block (Pitch - 3.81 mm)
	Impedance	52 Ω
	Connector	RJ45
	Configurable Settings	8 Channels Mixer
	Gain	
	Maximum Volume	
Power	Supply	PoE powered (IEEE 802.3at)
	Consumption	3.75 W
Phantom power		+48 V DC

Product Features:

Dimensions		108 x 44 x 165 mm (W x H x D)
Weight		0.48 kg
Accessories	Included	Bluetooth antenna
	Optional	MBS1xx Optional Wall mounting brackets

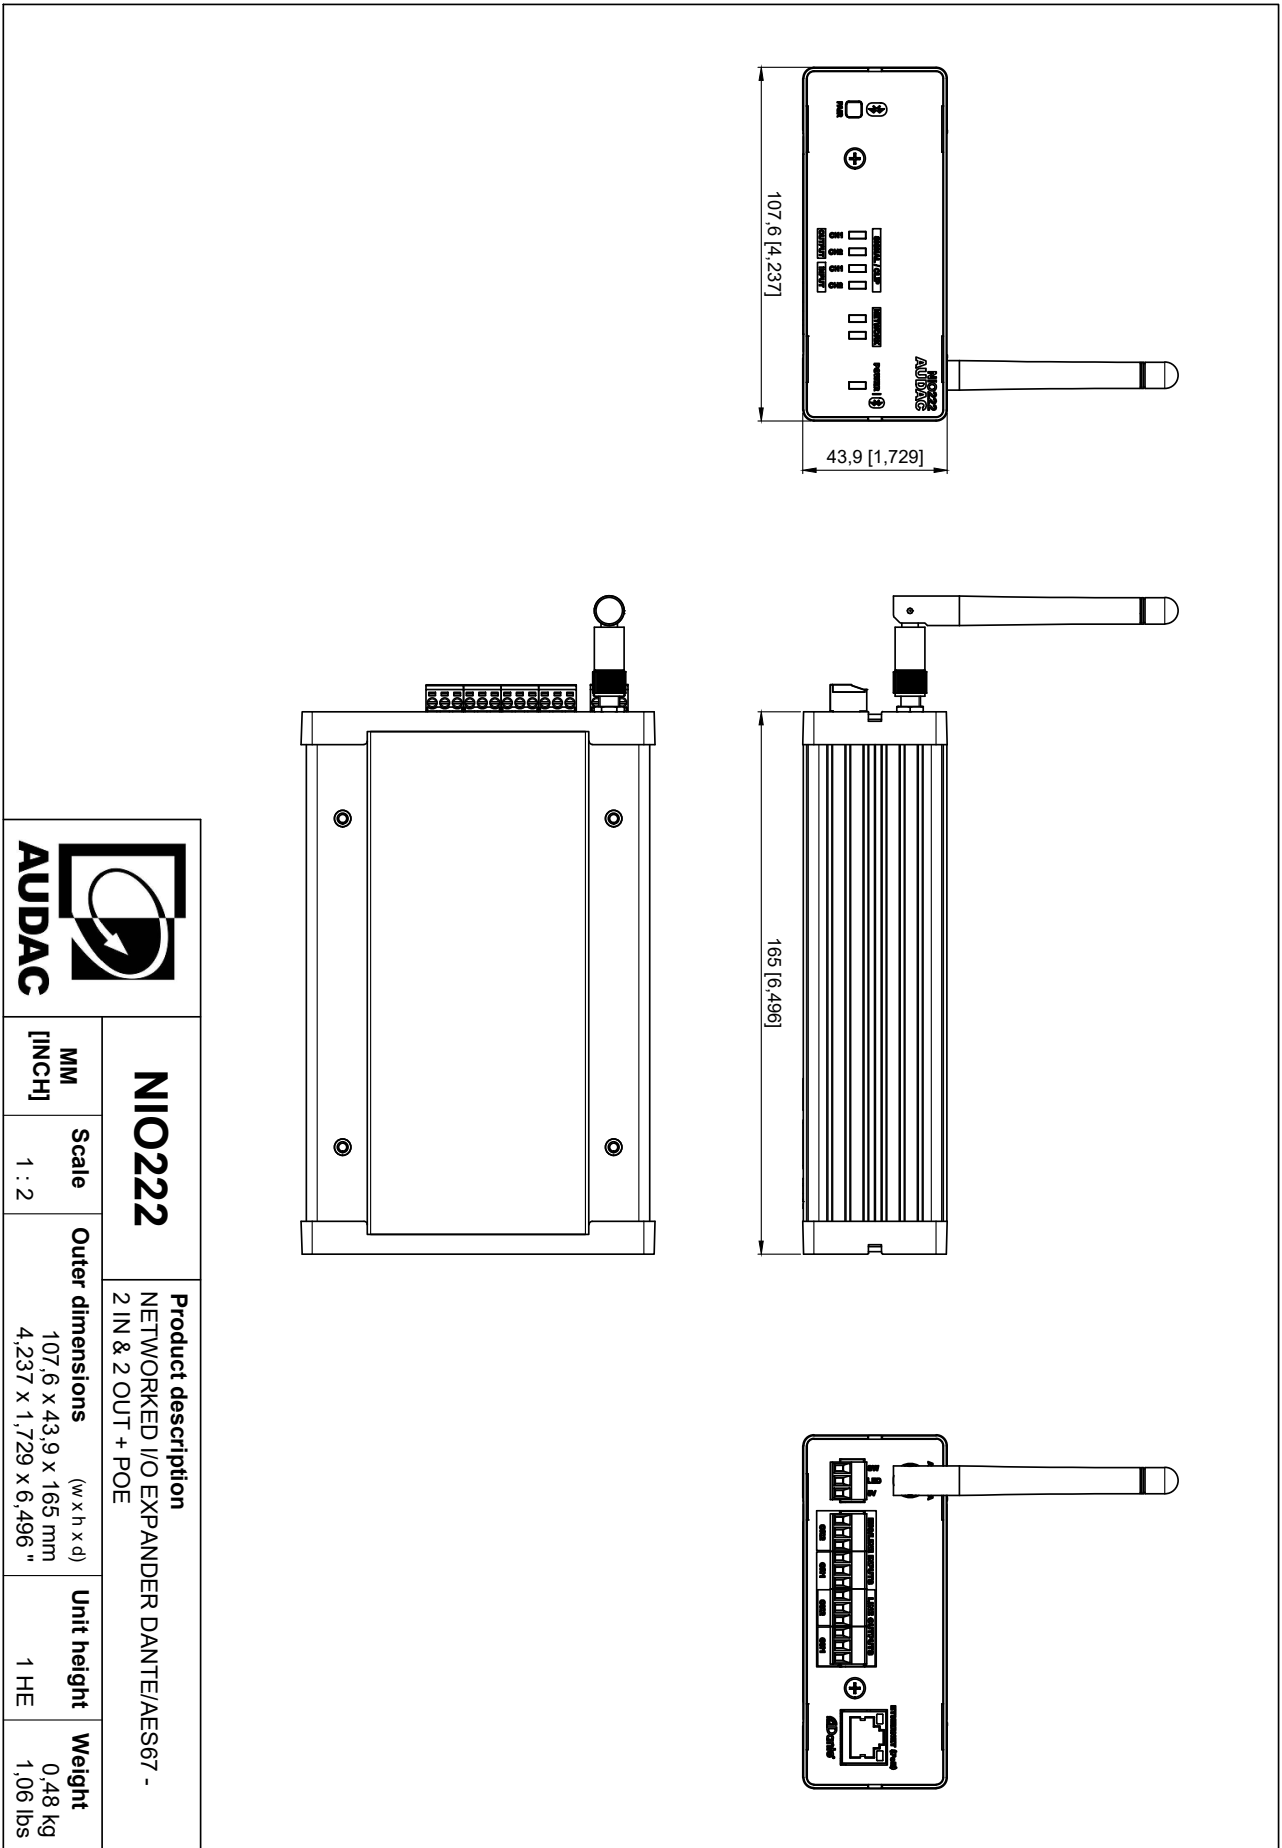

		NIO222		Product description NETWORKED I/O EXPANDER DANTE/AES67 - 2 IN & 2 OUT + POE	