



Versatile High Performance for the Boardroom, Classroom and Beyond

Versatile DLP® Projectors with 2xHDMI Ports

The InFocus Genesis IV Series projectors offer exceptional versatility and performance. With high brightness, a comprehensive range of resolutions, and broad range of connectivity options, these projectors are a perfect fit for various applications. Whether you're delivering classroom lessons, conducting office presentations, or enjoying the latest games, these projectors consistently deliver exceptional performance and reliability.



Models:

IN0022SL, IN0024SL, IN0026SL,
IN0028SL, IN0024ST, IN0026ST

Industry-leading 15000 Hours of Lamp Life

Our lamps are designed to last longer, ensuring extended durability and long-term performance. This exceptional longevity reduces the need for replacements, offering unparalleled reliability and cost savings over time.

Seamlessly Switch Between Different Devices

Easily connect to multiple sources and switch effortlessly between the devices for your projection needs ensuring a hassle-free viewing experience and enhancing overall performance.

Bright, Vivid Images on Any Surface

Transform any room into a dynamic visual space even in well-lit rooms. With 4000 lumens on standard throw models and 3800 lumens on short throw models, image colours and details are crisp and clear.

Eco-Friendly with Minimal Maintenance

With minimal maintenance and no filter to replace, this means less waste and reduced environmental impact contributing to sustainability for a greener future while providing reliable and consistent performance.

MORE REASONS TO CHOOSE THE GENESIS IV SERIES



Advanced Digital Image Correction

With the new digital edge masking and image shift features, we make perfecting those final image adjustments easy.



Direct Power On/ Direct Power off

No more waiting. The projector instantly powers up when it receives an electric current. When you are finished, simply switch off the power, no need for lengthy cooling period to shut it down.



Low Total Cost of Ownership

Incredible 15,000 hours of lamp life and filter-free lamp design offers unbeatable value and makes it a smart investment.



24/7 Operation

The Genesis IV Series is designed for 24/7 operations in standard orientation and is ideal for applications requiring extended projection periods.



Comprehensive Range of Resolutions from SVGA to 1080p Full HD

Enjoy the flexibility and versatility needed to handle any projection scenario, ensuring your visuals are always crisp, clear, and impactful.



USB-A Power for Devices

The integrated USB-A power source conveniently powers HDMI devices like Google Chromecast or a wireless dongle to enhance presentation performance.



Lightweight and Portable

Its compact and light form makes it portable giving you flexibility for different uses.



Full 3D Capability

Captivate the audience with 3D content from almost any 3D source, including 3D Blu-ray players and the latest game consoles.



Outstanding 30000 : 1 Contrast Ratio

Indulge in a vivid, clear visual feast with enhanced image clarity and better details with deeper blacks and brighter whites.




Make A Bigger Impact With Short Throw Models

Ideal for smaller spaces and classrooms, you can get a big image with a short distance. With the projector placed closer to the wall, it reduces cast shadows on the image and also allows the teacher and presenter to walk around more freely.



GENESIS IV SERIES CONNECTIVITY

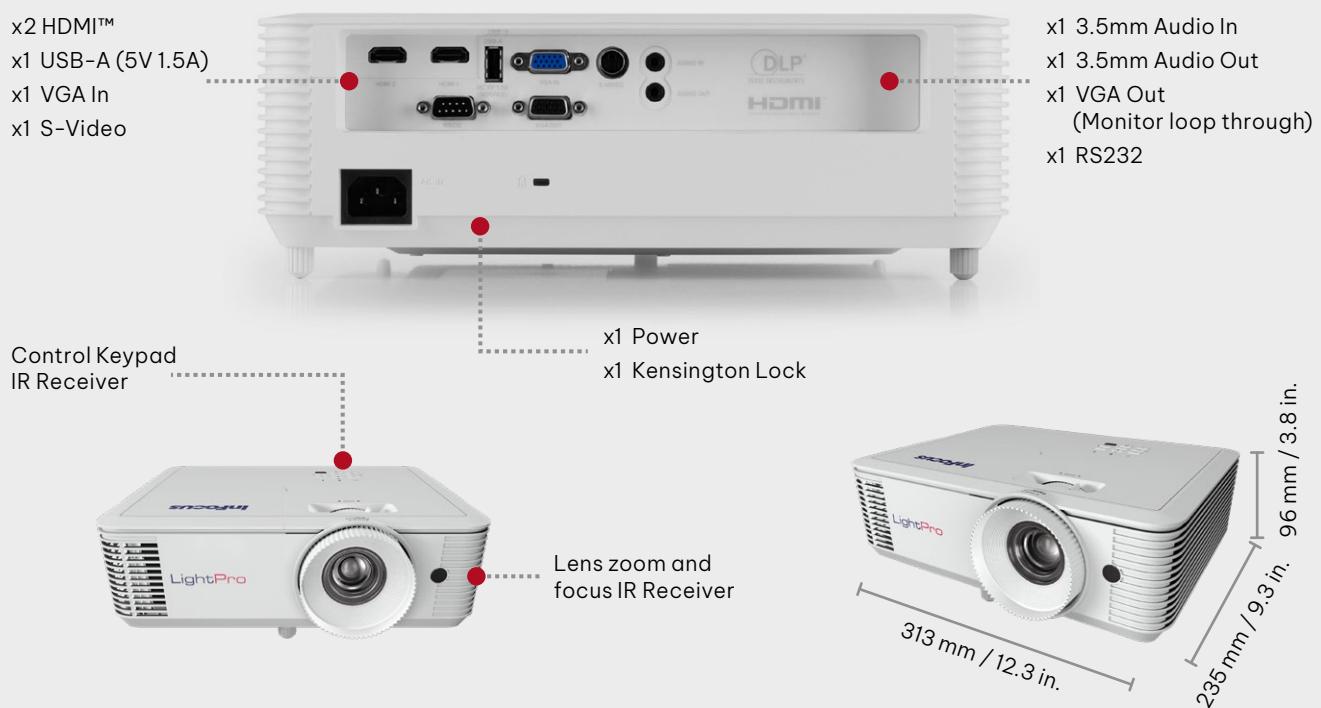

InFocus Genesis IV		IN0022SL	IN0024SL	IN0026SL	IN0028SL	IN0029SL	IN0024ST	IN0026ST
Image	Projection Technology	TI DLP®	TI DLP®	TI DLP®	TI DLP®	TI DLP®	TI DLP®	TI DLP®
	Panel Size	0.55" DMD	0.55" DMD	0.65" DMD	0.47" DMD	0.48" DMD	0.55" DMD	0.65" DMD
	Native Resolution	SVGA, 800 x 600	XGA, 1024 x 768	WXGA, 1280 x 800	1080P, 1920 x 1080	WUXGA, 1920 x 1200	XGA, 1024 x 768	WXGA, 1280 x 800
	Aspect Ratio	4:3	4:3	16 : 10	16:9	16 : 10	4:3	16 : 10
	Brightness (Lumens)	4000	4000	4000	4000	4000	3800	3800
	Contrast Ratio	30000 : 1	30000 : 1	30000 : 1	30000 : 1	30000 : 1	30000 : 1	30000 : 1
	Light Source	UHP Lamp	UHP Lamp	UHP Lamp	UHP Lamp	UHP Lamp	UHP Lamp	UHP Lamp
	Light Source Life Maximum (Hours)	15000	15000	15000	15000	15000	15000	15000
	Maximum Supported Resolution	1920 x 1200	1920 x 1200	1920 x 1200	1920 x 1200	1920 x 1200	1920 x 1200	1920 x 1200
	Horizontal Sync. Range (KHz)	15 ~ 97.55	15 ~ 97.55	15 ~ 97.55	15 ~ 97.55	15 ~ 97.55	15 ~ 97.55	15 ~ 97.55
Optical	Vertical Sync. Range (Hz)	54 ~ 85	54 ~ 85	54 ~ 85	54 ~ 85	54 ~ 85	54 ~ 85	54 ~ 85
	Uniformity (%)	80%	80%	80%	80%	80%	80%	80%
	Lens	1.1X	1.1X	1.1X	1.1X	1.1X	1:1 Fixed	1:1 Fixed
	Lens Zoom Adjustment	Manual	Manual	Manual	-	-	-	-
	Image Offset (%)	115%	115%	112.4%	116%	110%	112.4%	112.4%
	Focal Length (mm)	21.85~24.01	21.85~24.01	21.85~24.01	21.85~24.02	21.85~24.02	7.15	7.15
	Keystone Adjustment	Manual	Manual	Manual	Manual	Manual	Manual	Manual
	Vertical Keystone Correction	± 40°	± 40°	± 40°	± 40°	± 40°	± 20°	± 20°
	Projection Factor	1.94 ~ 2.16 : 1	1.94 ~ 2.16 : 1	1.54 ~ 1.72 : 1	1.47 ~ 1.62 : 1	1.47 ~ 1.62 : 1	0.621 : 1	0.52 : 1
	Projection Distance (Meters/Feet)	1.2 ~ 12.0 / 3.94 ~ 39.36	1.2 ~ 12.0 / 3.94 ~ 39.36	1.0 ~ 10.0 / 3.28 ~ 32.8	1.0 ~ 9.8m / 3.28 ~ 32.14	1.0 ~ 9.5 / 3.28 ~ 31.16	0.4 ~ 3.37 / 1.31 ~ 11.05	0.4 ~ 3.37 / 1.31 ~ 11.05
General	Optical Zoom	1.1:1	1.1:1	1.1:1	1.1:1	1.1:1	1:1 Fixed	1:1 Fixed
	Digital Zoom Demagnification / Magnification	0.8x ~ 2.0x	0.8x ~ 2.0x	0.8x ~ 2.0x	0.8x ~ 2.0x	0.8x ~ 2.0x	0.8x ~ 2.0x	0.8x ~ 2.0x
	Focus Adjustment	Manual	Manual	Manual	Manual	Manual	Manual	Manual
	Product Dimensions (L x W x H) (mm / in)	313 x 236 x 96.4/ 12.4 x 9.3 x 3.8		Operating Humidity (%)	10 ~ 85		Max Operating Altitude (meters / feet)	Power Supply
	Product Weight (Kilograms / Pounds)	2.9 / 6.4		Storage Humidity (%)	10 ~ 85		Operating Temperature (Celsius / Fahrenheit)	Power Consumption Min / Max (w)
General	Packaged Dimensions (L x W x H) (mm / in)	395 x 337 x 166/ 15.6 x 13.3 x 6.5		Fan Noise (dB)	27		Storage Temperature (Celsius / Fahrenheit)	Safety and Regulatory
	Packaged Weight (Kilograms / Pounds)	4.1 / 9.0		Audio (W)	1 x 10		Security	Environmental
					Kensington Security Slot™, PIN Code Lock & Timer			CB, CE, EAC, cTUVus, CCC, FCC, UKCA, NOM, PSB, BIS
								WEEE, EU RoHS, China RoHS, CEL, CECP

* Product specifications, terms, and offerings are subject to change at any time without notice and may vary between countries. Please check with your local InFocus distributor for more information.

** Actual lamp life may vary based on the environment and projector usage. Conditions that may affect lamp life include temperature, altitude, and air particulate matter etc.

Images shown herein are simulations. ©2024 Maxnerva Technology Services Limited. All rights reserved. InFocus and the InFocus logo are trademarks of Maxnerva Technology Services Limited. All trademarks or registered trademarks are the property of their respective companies.
INFOCUS_GENESISIV_DS_EN_VER_17072401

InFocus
W W W . i n f o c u s . c o m