

ViewSonic® LCD DISPLAY VA3820C


Key Features

- Integrated USBC workstation offers audiovisual and data transfer, and 96W power delivery
- USB 3.2 hub with 1 upstream, 2 downstream ports, HDMI, and DisplayPort inputs for easy connectivity
- 21:9 ultrawide screen with UWQHD+ 3840 x 1600 resolution
- 2300R Curved panel
- Height adjustable swivel stand with tilt function



Product Description

The ViewSonic VA3820C is a 38" UWQHD+ (3840 x 1600) monitor featuring USB 3.0 Hub with 1 upstream, 2 downstream ports, HDMI, and DisplayPort for business and home use. Its 21:9 aspect ratio and 2300R curvature provide an immersive viewing experience. Simplify your work with just one cable that provides audiovisual, data and 96W power transfer. The 75hz refresh rate, Eye ProTech+ technology, and various ViewMode presets cater for optimal screen performance and comfortable viewing without tearing or stuttering. Expand your workspace and experience truly seamless, ergonomic multitasking on just one screen with a VESA-compatible mount at low energy consumption.

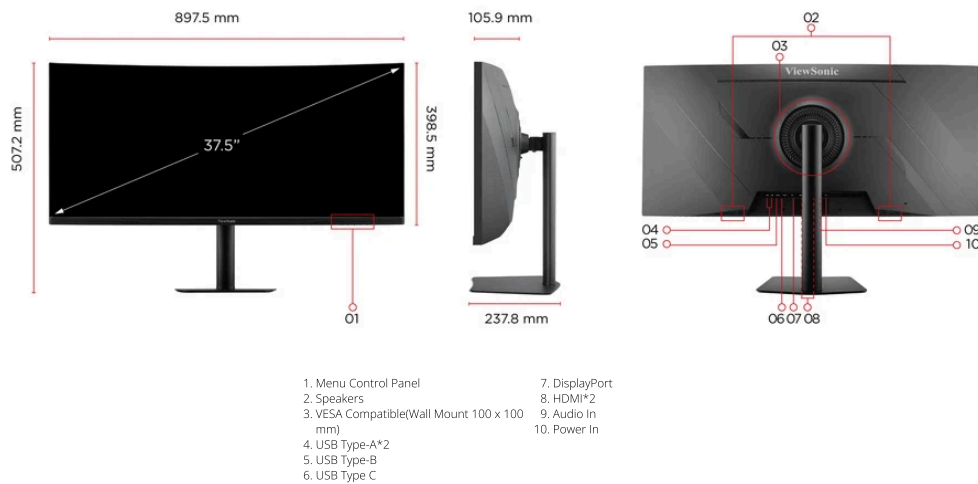

Visit Us www.viewsonic.com



DISPLAY		WEIGHT (IMPERIAL)	
Display Size (in.):	38	Net (lbs):	20.7
Viewable Area (in.):	37.5	Net Without Stand (lbs):	15.9
Panel Type:	IPS Technology	Gross (lbs):	29.3
Resolution:	3840 x 1600	WEIGHT (METRIC)	
Resolution Type:	WQHD+ (Wide QHD+)	Net (kg):	9.4
Static Contrast Ratio:	2,000:1 (typ)	Net Without Stand (kg):	7.2
Dynamic Contrast Ratio:	50M:1	Gross (kg):	13.3
High Dynamic Range:	HDR10	DIMENSIONS (IMPERIAL) (WXHxD)	
Light Source:	LED	Packaging (in.):	45.3 x 20.7 x 7.5
Brightness:	300 cd/m² (typ)	Physical (in.):	35.33 x 14.85~19.96 x 9.36
Colors:	1.07B	Physical Without Stand (in.):	35.33 x 15.69 x 4.17
Color Space Support:	10 bit (8 bit + A-FRC)	DIMENSIONS (METRIC) (WXHxD)	
Aspect Ratio:	21:9	Packaging (mm):	1150 x 525 x 190
Response Time (GTG w/OD):	4.785ms	Physical (mm):	897.5 x 377.2~507.2 x 237.8
Viewing Angles:	178° horizontal, 178° vertical	Physical Without Stand (mm):	897.5 x 398.5 x 105.9
Backlight Life (Hours):	30000 Hrs (Min)	GENERAL	
Curvature:	2300R	Regulations:	Energy Star, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, RCM
Refresh Rate (Hz):	75	PACKAGE CONTENTS:	VA3820C x1, 3-pin Plug (IEC C13 / CEE22) x1, HDMI Cable (v2.0; Male-Male) x1, DisplayPort Cable (v1.4; Male-Male) x1, USB Type-C Cable (Male-Male) x1, USB A/B Cable (v3.2; Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1
Variable Refresh Rate Technology:	Yes		
Low Blue Light:	Hardware solution	Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Flicker-Free:	Yes	Warranty:	*Warranty offered may differ from market to market
Color Gamut:	DCI-P3: 98% size (Typ) NTSC: 95% size (Typ) sRGB: 134% size / 100% coverage (Typ)	Power Management:	Energy Star standards
Pixel Size:	0.229 mm (H) x 0.229 mm (V)		
Surface Treatment:	Anti-Glare, Hard Coating (3H)		
COMPATIBILITY			
PC Resolution (max):	3840x1600		
Mac® Resolution (max):	3840x1600		
PC Operating System:	Windows 10/11 certified; macOS tested		
Mac® Resolution (min):	3840x1600		
CONNECTOR			
USB 3.2 Type A Down Stream:	2		
USB 3.2 Type B Up Stream:	1		
USB 3.2 Type C Up Stream; DisplayPort Alt mode :	1 (96W power charger)		
3.5mm Audio Out:	1		
HDMI 2.0 (with HDCP 2.2):	2		
DisplayPort:	1		
Power in:	DC Socket (Center Positive)		
AUDIO			
Internal Speakers:	2.5Watts x2		
POWER			
Eco Mode (Conserve):	26W		
Eco Mode (optimized):	29W		
Consumption (typical):	32W		
Consumption (max):	39W		
Voltage:	AC 100-240V		
Stand-by:	0.5W		
Power Supply:	External Power Adaptor		
ADDITIONAL HARDWARE			
Kensington Lock Slot:	1		
CONTROLS			
Physical Controls:	M, Right, Left, E, Power		
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu		
OPERATING CONDITIONS			
Temperature:	32°F to 104°F (0°C to 40°C)		
Humidity (non-condensing):	20% to 90%		
WALL MOUNT			
VESA Compatible:	100 x 100 mm		
INPUT SIGNAL			
Frequency Horizontal:	HDMI (v2.0): 15 ~ 222KHz, DisplayPort (v1.4): 15 ~ 222KHz, Type C: 15 ~ 222KHz		
Frequency Vertical:	HDMI (v2.0): 30 ~ 75Hz, DisplayPort (v1.4): 48 ~ 75Hz, Type C: 48 ~ 75Hz		
VIDEO INPUT			
Digital Sync:	TMDS - HDMI (v2.0), PCI-E - DisplayPort (v1.4), Micro-Packet - Type C		
ERGONOMICS			
Height Adjust (mm):	130		
Swivel:	60°		
Tilt (Forward/Back):	-5° / 15°		