ViewSonic ViewBoard IFP7534 Enterprise Device Licensing Agreement (EDLA) Certified ViewBoard 75" 4K Interactive Displa...

ViewSonic MewBoard IFP7534


Key Features

- EPEAT Gold Certification with 20% better power efficiency than the previous generation.
- Integrated ViewSonic Education Software empowers teachers and boosts learning outcomes.
- EDLA-certified Android 14 unlocks Google Play Store access for a world of apps.
- Quad-core CPU and microSD port deliver fast performance with expandable storage.
- Dual USB-C ports power fast transfers, reliable charging, and effortless connectivity.



Product **Description**

Start your EdTech journey right with the ViewBoard IFP34 Series, designed with enhanced writing functionality and optimized power efficiency to meet the needs of K12 and higher education. Powered by EDLA-certified Android 14, it offers a smooth, secure user experience with full access to the Play Store for endless educational and productivity apps. Integrated ViewSonic Education Software takes it even further, adding powerful tools for digital whiteboarding, wireless casting, and centralized device management. Together, these features empower educators to create engaging, interactive learning environments, all while simplifying classroom workflows.

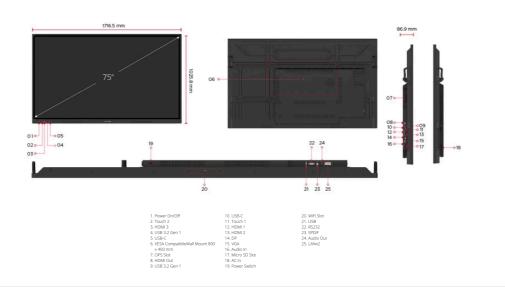



14.04.2025, 11:52

ViewSonic ViewBoard IFP7534 Enterprise Device Licensing Agreement (EDLA) Certified ViewBoard 75" 4K Interactive Displa...

DISPLAY Panel Size:	75"	DIMENSIONS (W X H X D)	67 5 x 10 1 x 3 12 /m \ / 1716 5 x 1005 0 x 06 0 /
	75"	Physical (inch / mm):	67.5 x 40.4 x 3.42 (in.) / 1716.5 x 1025.8 x 86.9 (mm)
Panel Type:	TFT LCD Module with DLED Backlight.	Packaging (inch / mm):	73.22 x 44.29 x 7.28 (in.) / 1860 x 1125 x 185 (mm)
Display Area (mm):	1650.24(H) x 942.01(V)	WEIGHT	
Aspect Ratio:	16:9	Net (lb / kg):	108.03 lb / 49 kg
Resolution:	UHD 3840x2160(Pixels)	Gross (lb / kg):	133.38 lb /60.5 kg
Colors:	1.07B colors	REGULATIONS	
Brightness:	350 nits	SVHC List, & DoC, EEL, WEEE	C, LVD or CB, RoHS Green BOM, & RoHS DoC, ErP, REACH , BSMI,BIS
Contrast Ratio:	5000:1 (max. with DCR enabled)	PACKAGE CONTENTS	
Response Time:	8ms	1. 3m power cord by ship area	2. Remote control with AAA battery 3. 3m touch USB cable 4.
Viewing Angles:	H=178, V=178	Passive pen x 2 5. Quick Start 8. Camera Plate 9. Screw x 8 (c	Guide + Compliance statement 6. RS232 adapter 7. Clamp x camera 2+2, wall mount 4) 10. HDMI cable 3m
Backlight Life:	50,000 Hours (8 hours of use per day)	COMPATIBLE SLOT-IN PC	
Surface Treatment:	Hardness: 9H Pencil hardness with Anti-glare coating	VPC3X, VPCF5-2A, VPCF5, VF	PC-A31-O1
Orientation:	Landscape		
PLATFORM			
Processor:	Quad-core		
RAM:	8GB DDR4		
Storage:	128 GB		
тоисн			
Type/ Tech:	Ultra Fine Touch Technology		
Touch Resolution:	32767 x 32767		
Touch Point:	40 points touch		
Palm Rejection:	Yes	-	
NPUT			
HDMI:	x3 (Front x1: HDMI2.1 4K@60Hz/HDCP 2.3/CEC; Rear x		
	2:HDMI2.1 4K@60Hz/HDCP 2.3/CEC/ARC for HDMI 2)		
RGB / VGA:	x1		
DisplayPort:	x1		
Audio:	x1		
RS232:	x1		
SD/SDHC:	x1		
OPS:	x1 (Optional Intel Standard OPS)		
WiFi:	x1 (Optional VB-WIFI-004/VB-WIFI-006/VSB-050)		
OUTPUT			
HDMI:	HDMI 2.0 x1		
Audio:	x1		
SPDIF:	x1		
LAN			
RJ45:	x2		
USB			
Туре А:	USB3.2 Gen 1 x 4 (Front x 2; Rear x 2)		
	USB 2.0x1 (Rear)		
Туре В:	USB 3.0 x2 (Rear x1 + Front x1)		
Type C:	Front*1 [PD65W (15W with OPS, 65W without OPS)+ DP1.2 + Data + 10M/100M sharing) Rear*1 [PD15W + DP1.2 + Data + 10M/100M sharing]		
SPEAKERS			
20W x 2			
TOP CAMERA PLATE			
Yes			
EMBEDDED OS			
Android 14 EDLA			
BUNDLE SOFTWARE			
Basic Annotation Software:	myViewBoard		
Pro Annotation Software:	myViewBoard for Windows (Embedded in optional Windows Slot-in PC)		
Wireless Presentation:	AirSync		
Device Management:	Manager		
ViewSonic Launcher:	Yes		
SPECIAL FEATURES			
All-in-one USB port:	(combine slot-in PC/Android/HDMI USB port) Front "SmartPort™ USB" to all channels.		
Simple LAN sharing between IFP and slot-in device:	10/100M for Android & Slot-in PC		
Light Sensor:	Yes		
POWER			
Voltage:	100-240V AC		
Consumption:	On:89.24W ; Off: ≤ 0.5W		
ERGONOMICS			
Wall Mount (VESA®):	800*400		
OPERATING CONDITIONS			
Temperature (° C):	0°C to 40°C		

Copyright © ViewSonic Corporation 2000-2025. All rights reserved.