


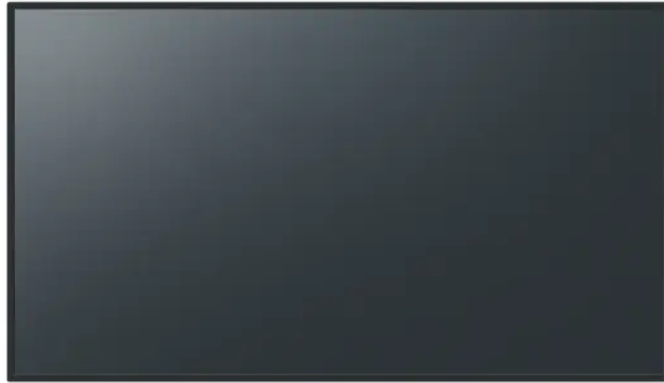

Von Besprechungsräumen und Klassenzimmern bis hin zu Einzelhandelsräumen und öffentlichen Einrichtungen - mit hoher Bildqualität und zuverlässiger Leistung in einer Vielzahl von Anwendungen.

TH-65SQ3

Entwickelt, um die ideale Balance zwischen Leistung und Funktionalität für professionelle und kommerzielle Anwendungen zu bieten.

Key Features

Hohe 4K-Bildqualität für klare und detaillierte Bilder

Flexible Installation für eine Vielzahl von Anwendungsfällen

Skalierbarkeit, die die Zusammenarbeit mit verschiedenen Systemen ermöglicht

TH-65SQ3

<https://eu.connect.panasonic.com/de/de/professional-displays/th-65sq3>

DISPLAY PANEL -> Screen Size	65-inch class (64.52-inch / 1638.9 mm)
DISPLAY PANEL -> Brightness (typ.)	500 cd/m ²
DISPLAY PANEL -> Aspect ratio	16:9
DISPLAY PANEL -> Effective Display Area (W x H)	1428.4 x 803.5 mm (56.23" x 31.63")
DISPLAY PANEL -> Resolution	3840 x 2160
DISPLAY PANEL -> Contrast Ratio (typ.)	1200:1
DISPLAY PANEL -> Response Time (typ.)	8.0 ms (G to G)
DISPLAY PANEL -> Viewing Angle(H / V)	178°/178° (CR > 10)
DISPLAY PANEL -> Panel Surface Treatment	Anti-glare type
DISPLAY PANEL -> Haze	25%
CONNECTION TERMINAL -> HDMI™ IN	HDMI™ Type A Connector x 3 (HDCP 2.2 supported)
CONNECTION TERMINAL -> PC IN	Mini D-sub 15-pin x 1 (DDC2B)
CONNECTION TERMINAL -> SERIAL IN	External control terminal D-sub 9-pin x 1 (Male), RS232C Compatible
CONNECTION TERMINAL -> AUDIO 1 IN (L / R)	Stereo Mini Jack (ø3.5 mm) x 1
CONNECTION TERMINAL -> AUDIO OUT (L / R)	RCA Pin Jack x 2
CONNECTION TERMINAL -> LAN	RJ45 x 1 compatible with PLink™, 10BASE-T/100BASE-TX
CONNECTION TERMINAL -> USB TYPE A	USB Connector Type A x 1 (DC 5 V / 2 A, USB 2.0 is supported)
AUDIO -> Built in Speaker	20 W [10 W+10 W]
ELECTRICAL -> Power Supply	AC 110-240 V 50/60 Hz 2.5-1.3 A
ELECTRICAL -> Power Consumption	184 W(Shipping Condition)
ELECTRICAL -> On Mode Average Power Consumption *1	180 W
ELECTRICAL -> Power Off Condition	Approx. 0.3 W
ELECTRICAL -> Stand-by Condition	Approx. 0.5 W
MECHANICAL -> Dimension(W)	1463 mm (57.58")
MECHANICAL -> Dimension(H)	838 mm (32.97")
MECHANICAL -> Dimension(D)	69 mm (2.72")*1
MECHANICAL -> Weight	Approx. 27.1 kg (59.8 lbs.)
MECHANICAL -> Bezel Width(T)	14.9 mm (0.59")
MECHANICAL -> Bezel Width(B)	14.9 mm (0.59")
MECHANICAL -> Bezel Width(L)	14.9 mm (0.59")
MECHANICAL -> Bezel Width(R)	14.9 mm (0.59")
MECHANICAL -> Pitch for Wall-Hanging / Screw / Screw hole depth	VESA Compliant 400 x 400 mm (15.8" x 15.8") / M8 / 20 mm (0.79")
INSTALLATION -> Orientation *3	Landscape / Portrait
INSTALLATION -> Tilting Angle	0 - 20 degrees forward / backward with landscape / portrait setting
INSTALLATION -> Operating Time *4	24h / day
ENVIRONMENT -> Operating Environment(Temperature)	0°C to 40°C (32°F to 104°F) : for up to 0-1400 m (4593 ft) altitude 0°C to 35°C (32°F to 95°F): for between 1400 m (4593 ft) and 2800 m (9186 ft) altitude
ENVIRONMENTAL -> Operating Environment(Humidity) (No condensation)	20% to 80%
ELECTRICAL -> Apparent power	255 VA
ELECTRICAL -> Energy efficiency class for Europe	G
Fußnote	1. Based on IEC 62087 Ed.2 measurement method. 2. Not including handles. 3. Please contact your sales representative with regard to the tilt angle before installation. 4. In case of running for a long time, the moving image is recommended to be displayed. If you display a still picture for an extended period, the image retention might remain on the screen. However, image retention can gradually disappear by displaying movie images.