
Downloaded: November 18, 2026

Fusion® Side Channel Speaker Adapter, Extra-Large Displays **SKU: FCA841**

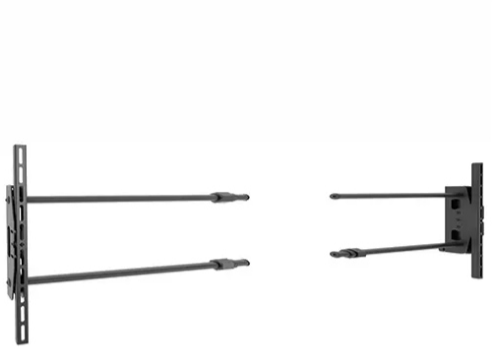

Install these accessories to apply AV speakers to your Fusion® mounted display.
FCA841 supports mounting speakers on the side of the display at the following width ranges, depending on the application:

- Wall mounts: 44.8"-84.8" (1137.9mm-2153.9mm)
- Ceiling/cart: 46.2"-77.6" (1173.5mm-1971.0mm)

Please see the technical drawings below for more detail.
The following accessories are compatible with all Fusion® Series mounts.

- Carts
- Stands
- Ceiling
- Wall
- Expandable
- Universal design accommodates most speaker brands
- Low-profile design does not add depth to installation
- Compatible with Fusion® fixed and tilt wall mounts
- TAA Compliant
- Drawer
- Tempo Dual-Display Accessory

Specifications

Dimensions & Measurements

Depth	7.62 cm (3 in)
Height	40.64 cm (16 in)
Overall Dimensions	16" x 47-78" x 3" (406 x 1194 - 1981 x 76 mm)
Shipping Weight	7.19 kg (15.9 lbs)
Typical Screen Size	50" - 95" (1270mm - 2413mm)
Weight Capacity	20 lbs (9.07 kg)
Width	47-78

Characteristics & Features

Accessory Type	Speaker Accessories
Application	Side
Color	Black
Installation Items	• Allen Wrench • Drill • Pencil • Phillips Head Screwdriver • Wrench
Solution Type	Universal
TAA Compliant	Yes
UPC	841872163864

Certifications & Warranties

Certifications	TAA

Source: https://www.legrandav.com/products/accessories/display-tv-accessories/fca8xx-speaker-adapters/fca841