



FOR MICROSOFT TEAMS ROOMS

# UMB202


## Key Features

- Sony 4K Ultra HD camera sensor for advanced image processing
- Intelligent auto framing and DOA voice tracking technology
- 6-mic array beamforming soundbar with an 11W speaker



## Product Description

The UMB202 TeamJoin™ 4K Video Bar System is part of the ViewSonic TeamJoin™ solutions for Microsoft Teams Rooms, optimizing collaboration in meeting rooms of diverse sizes. Boasting a 4K Sony camera sensor, 5x digital zoom, auto-framing, and DOA voice tracking, it delivers a premium visual experience. Complemented by six beamforming microphones, which cover an expansive 8-meter range, and an 11W speaker, the camera ensures crystal-clear audiovisual quality for seamless communication.

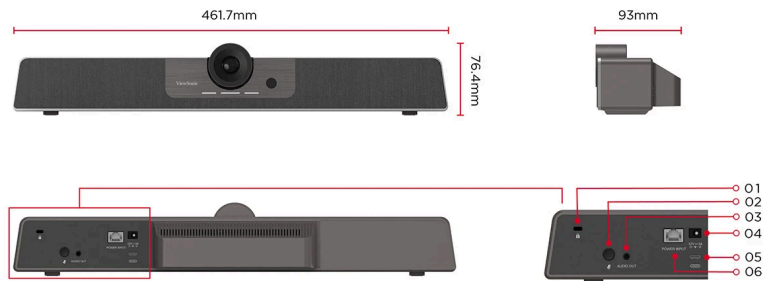

1. K-Slot
2. Mic Mute
3. Audio Out
4. DC in
5. C-type USB Port
6. Power input via RJ45

### We value your privacy

We use cookies to enhance your browsing experience, serve personalized ads or content, and analyze our traffic. By clicking "Accept All", you consent to our use of cookies.

Customize

Reject All

Accept All

**CAMERA**

Resolution:	H.264/MJ: @30FPS (1)3840×2160 (2)2560×1440 (3)1920×1080 (4)1280×720 (5)1024×576 (6)960×540 (7)800×600 (8)640×480 (9)640×360 (10)480×270 (11)352×288 (12)320×240 NV12 / YUY2: @30FPS (1) 1920×1080 (2) 1280×720 (3) 640×360
Sensor:	IMX577 1/2.3 inch, CMOS, 12M pixel
FOV:	117.8° (DFOV) , 109° (HFOV), 74.4° (VFOV)
PTZ:	EPTZ (5X digital Zoom)
Digital Noise Reduction:	Yes
White Balance:	Yes
Exposure:	Yes

**AUDIO**

Microphone array:	6 element, 8 meters pickup range
Speaker:	mid-bass module x1, treble module x1 in one box (Maximum output 8W + 3W)
Output Power:	80 dBA @ 1000 Hz @ 1 meter at maximum volume

**I/O**

USB-TypeC:	1
Audio Out:	1
DC 2.0 Power:	1
RJ45:	1 (Only for power supply) IEEE 802.3 at, 25.50W (max)
Power Button:	Power Button: In startup mode, press the power button to mute. In standby mode, press the power button to power on.
MIC Mute Button:	Yes

**USB FEATURE**

Connection type:	USB 3.0, downward compatible with USB2.0
Video Compression:	MJPEG /YUY2 / H.264 / NV12
USB audio:	16K sampling rate, support UAC2.0
USB video communication protocol:	UVC 1.1

**ACCESSORY (INBOX)**

USB Type-C cable:	1.8m typeC x1 (include TypeC to A Plug adaptor)
Remote Control:	Yes
Power adapter:	1
Wall mount components:	1
Screws:	Yes
Lens Cover:	1
QSG:	Yes
Compliance statement:	Yes

**We value your privacy**

We use cookies to enhance your browsing experience,  
serve personalized ads or content, and analyze our traffic.  
By clicking "Accept All", you consent to our use of cookies.