



1 - 3 m

5 m

INLINE® USB DISPLAY CABLE

USB-C plug to HDMI plug

For connecting HDMI monitors to the computer with USB Type-C interface and DisplayPort Alternate Mode support.

USB Type-C plug to HDMI A plug

High-quality black anodised aluminium metal plug with gold-plated contacts

Supports resolutions up to 3.840 x 2.160 @60Hz with RGB and YCbCr 4:4:4

Computers with Thunderbolt 3 are supported

Compatible with USB 3.1, VESA DisplayPort 1.2 and HDMI 2.0

To transmit video and audio signals

Supports 3D

HDCP 2.2 and 1.4 compatible, supports HDCP 2.2 according to the HDCP regulations and is downwards compatible

Chipset: LT8711EH-C

USB powered, no power supply necessary

Gold plated contacts

Plug & Play

System requirements:

From Windows 7/8/10, Mac OS 10.9 and newer

PC with a free USB Type-C port, that supports the DisplayPort Alternate Mode or PC with a free Thunderbolt 3 port



DisplayPort Alternative Mode support is usually indicated by the DisplayPort logo (D) to the right of the Type-C port.

Technical Data	
Article height:	1 cm
Article width:	2 cm
Brand:	InLine®
Colour:	Black
Device type:	Graphic adapter
Gold plated contacts:	No
Im Angebot:	No
Operation temperature:	0 - 50 °C
Side A:	USB-C male
Side B:	HDMI A plug
Signal:	Video
Storage temperature:	-20 - 60 °C
Type of packaging:	InLine® Header with Euro perforation


Item No.	Length	EAN
64111	1 m	4043718271214
64112	2 m	4043718271221
64113	3 m	4043718271238
64115	5 m	4043718303137





1 - 3 m



5 m

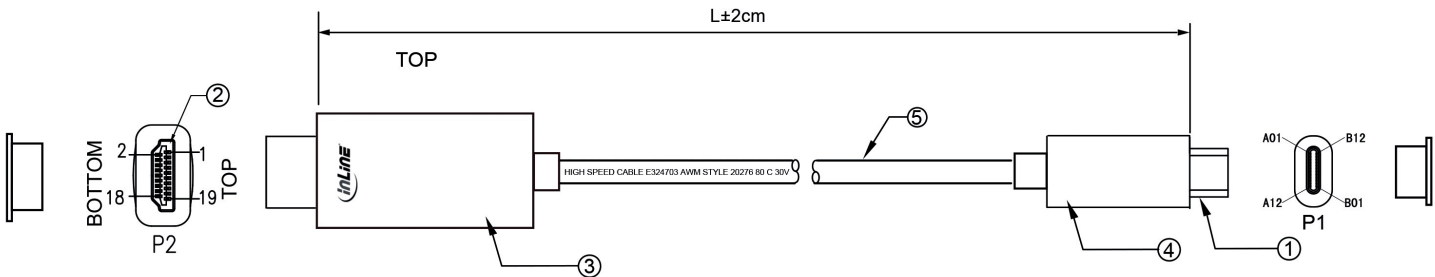


⑤	CABLE	[(32AWG*1P)+D+AM]*5PCS+32AWGX4C+AM+AL-MG+PVC OD: 5.0±0.1mm, COLOR: BLACK	L
④	OUTER MOLD	BLACK ALUMINIUM	1
③	OUTER MOLD	BLACK ALUMINIUM	1
②	CONNECTOR	HDMI MALE, GOLD PIN ,GOLD PLATED SHELL	1
①	CONNECTOR	USB3.1 TYPE C MALE,GOLD PLATED SHELL	1
No.	PART NAME	DESCRIPTION	QTY

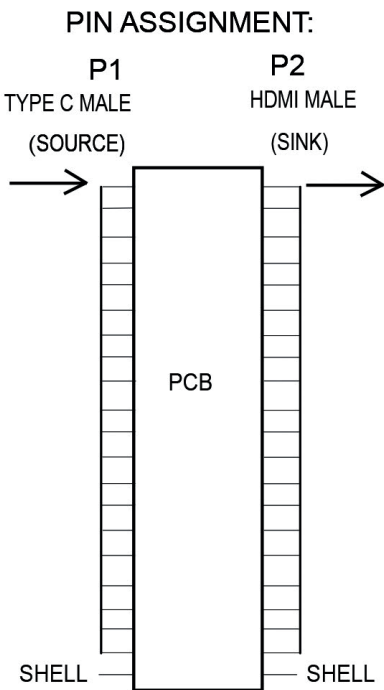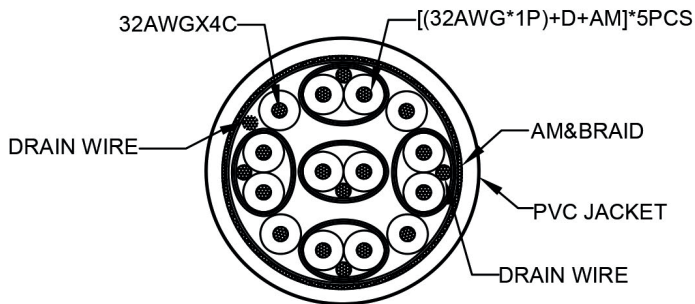

NOTE:


- 1.Electrical properties:
 - 1.ALL COMPONENTS ARE RoHS COMPLIANT.
 - 2.100% OPEN AND SHORT TEST.
 - 3.CONDUCTOR RESISTANCE:3 OHMS
 - 4.INSULATION RESISTANCE:10 MEGOHMS.
 - 5.HI-POT:DC200V/0.01S
 - 6.PX TEST 4K*2K 60Hz PASS 1080P PASS
- 2. ROHS 2.0 and REACH

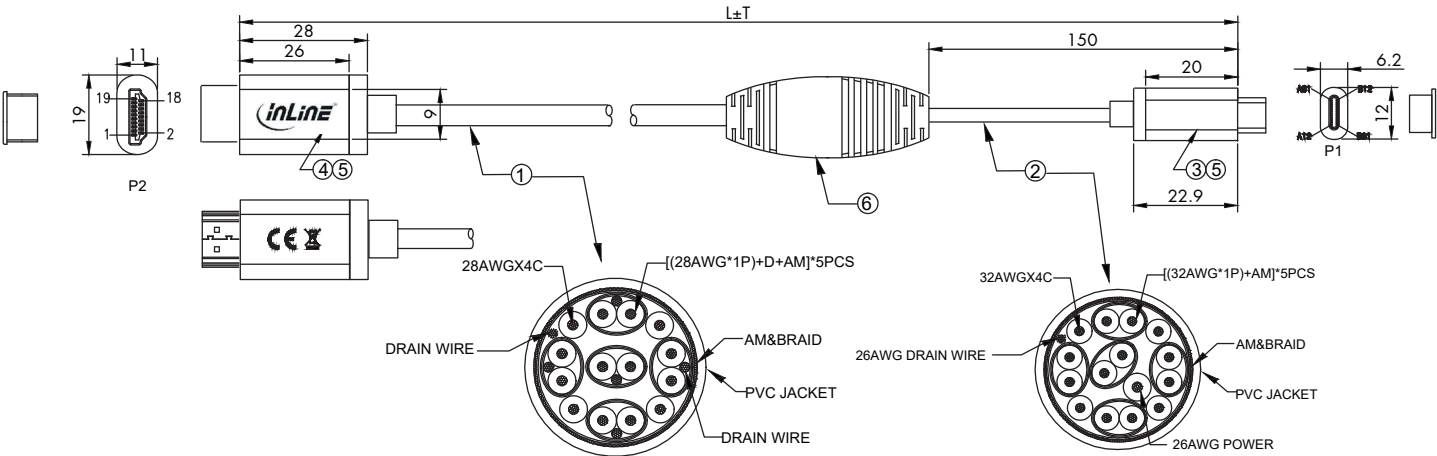

⑥	OUTER MOLD	BLACK ABS	1
⑤	OUTER MOLD	BLACK ALUMINUM	2
④	HDMI MALE	HDMI A MALE ,GOLD PLATED PIN,GOLD PLATED SHELL	1
③	C MALE	USB3.1 C MALE,GOLD PLATED SHELL	1
②	CABLE 2	(32AWG/1 COPPER*1P+AM)*5+32AWG/1 COPPER*4C+ADB, JACKET:PVC/BLACK OD:5.0±0.2MM	1
①	CABLE 1	(28AWG/1 COPPER*1P+D+AM)*5+28AWG/1 COPPER*4C+ADB+ JACKET:PVC /BLACK 7.0±0.2MM	1
NO.	PART NAME	DESCRIPTION	QUANTITY

NOTE:

- 1.Electronic test
 - 1.1 Open/short 100% test
 - 2.Tested by PC: 4k*2k@60Hz 4:4:4
 - 3.PRINTING:High Speed Cable 20276 80℃ 30V VW-1
 - 4.PACKING:1PCS/INLINE BAG+LABEL1,5PCS/PE BAG+LABEL2
- ROHS 3 support (EU 2015/863) Compliant

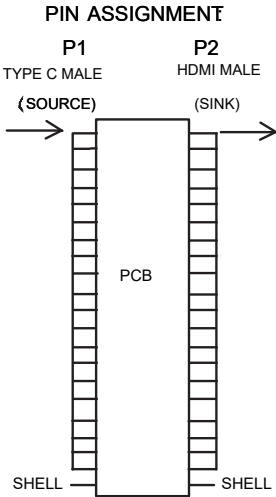

If you have any further questions, please contact marketing@inline-info.com www.inline-info.com/en/

Disclaimer
InLine® is a brand of INTOS ELECTRONIC AG | Siemensstraße 11 | D-35394 Gießen

Documentation © 2025 INTOS ELECTRONIC AG
All rights reserved. No part of this document may be reproduced in any form or by any means, electronic, mechanical or chemical, without the prior written permission of the publisher.
It is possible that this document may still contain typographical faults or misprints.

However, the information in this deocument will be checked regularly and corrections will be made in the next edition. We accept no liability for errors of a technical or printing nature and their consequences. All trademarks and industrial property rights are acknowledged. Changes in the sense of technical progress can be made without prior notice. Our products, including packaging, are not toys, they may contain small parts and sharp objects.

Please keep away from children.