
Downloaded: November 18, 2026

Tempo™ Portrait Large Flat Panel Wall Mount System **SKU: AS3PL**

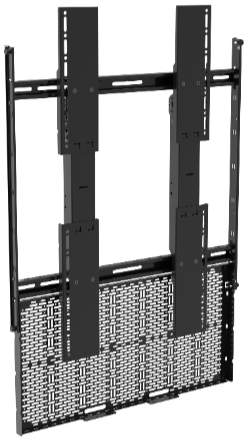

In digital signage and DOOH advertising, every minute of downtime means lost revenue and frustrated customers – yet traditional mounts often make maintenance slow and complex.

Tempo™ Portrait is the ultimate wall-mount solution for digital signage, purposefully designed to streamline installation, simplify service and maximize uptime.

Built with installer feedback and engineered for efficiency, it integrates a secure display mount with built-in storage and cable management to reduce clutter and streamline AV setups. Its innovative design features tool-less access and a 10.65" (27 cm) service extension for a total service depth of 12.6" (32 cm), allowing a single technician to reach devices quickly and safely without removing the display. The result? Faster installs, easier maintenance, and maximum uptime – so your content stays live, your operations run smoothly, and your ROI stays strong.

Simplify Service

- 12.6" (320 mm) of service depth and 10.6" (269 mm) of service extension
- Open wall plate for easy positioning of power and data sources and in-wall storage
- Home latch lockout clip prevents home latch from accidentally locking until pull cords are properly stowed

Product Features

- UL Listed for all common substrates – wood studs, steel studs, concrete, or block walls – Tempo ensures strength and reliability in any installation
- Storage panels can be pre-loaded with AV devices offsite for a truly streamlined installation experience – eliminating any surprises at the jobsite and ensuring peace of mind
- The pullout mechanism for service mode ensures ample access to stored devices, and consistently

ample access to stored devices, and consistently returns to its home position for uniform alignment across multiple displays
- Single-technician accessibility saves labor costs on maintenance calls and ensures quick service for clients, which maximizes valuable digital signage uptime
- Lockout clip prevents the home latch from accidentally locking until pull cords are properly stowed
- Technicians can lock the display in service mode with the lockout tab feature on the magnetic pull cord
- One part number, one box, one order – minimize last-minute shipping costs of missing parts

Feature Flexibility

- Wall plate and extended interface design facilitates centering display in the right position (800mm interface extender FHB5179 is included)
- 10° of adjustable display tilt in 2.5° increments

Streamlined for Success

- Total installation depth facilitates ADA compliance (when display depth is less than 2″ / 51 mm)
- Up to 1" (25 mm) post-install leveling adjustment

Integrated Storage

- Includes one 25.07″ x 12.72″ (637 x 323 mm) storage plate; second plate is optional
- Storage plate features quick release pins and can be installed on the top or bottom for best placement of devices
- Storage plate allows for 1 RU, 1.75" (44 mm) of storage clearance between the back of the display and the storage panel at 0-degree tilt
- Weight Capacity: 200 lbs (90.7 kg) when installed to 20 gage structural steel studs, wood studs, concrete, or block walls. 125 lbs (56.7 kg) when installed to 25 gage steel stud walls.

Specifications

Dimensions & Measurements

Lateral Shift	Yes
Overall Dimensions	26.56" x 39.27" x 1.96" (675 x 997 x 50 mm)
Typical Screen Size	55" - 100" (1397mm - 2540mm)
Wall Stud Compatibility	• 16” O.C. • 24” O.C.

Characteristics & Features

Adjustability	• Fixed • Lateral Shift • Micro-Adjustable • Tilt
Application	Wall
Color	Black
Includes PDU	No
Indoor/Outdoor	Indoor
Orientation	Portrait
Post-Installation Leveling Roll	1" (25 mm)
Solution Type	Universal
Special Features	ADA Compliant
TAA Compliant	No
Tilt	-10° / +0° in 2.5° increments
UPC	841872179049
VESA Mounting Pattern	200 x 200mm - 800 x 600mm

Certifications & Warranties	Certifications	• cULus • UL

Source: https://www.legrandav.com/products/mounts/display-tv-mounts/tempo-flat-panel-wall-support-system/as3pl