

CONNEXSYS™ VIDEO WALL PORTRAIT MOUNTING SYSTEM WITH RAILS



Certifications	UL Listed
Color	Black
Manual Height Adjustment	± 2.5 cm
Maximum Extension	34.0 cm
Minimum Depth	10.2 cm
Mounting Pattern Compatibility (Universal Versions)	200 x 100 - 700 x 400 mm
Orientation	Portrait
Overall Dimensions (HxWxD)	826 x 495 x 104 mm
Shipping Weight	19 kg
Solution Type	Universal
Tilt	+ 4.0°, -2.5°
Typical Screen Sizes*	42 - 80"
Weight Capacity	68 kg



Color option:



Watch the video



*Always check compatibility with the Chief mountfinder on the Chief website.

SPECIFICATIONS

- Mount unit to be compatible with mounting on standard 41mm channel strut for fast horizontal row leveling.
- 6 point of micro adjustments in one location at the top of the mount.
- Height adjustment minimum 2.5 cm on each interface
- Tilt adjustment at single pivot point, protects displays from twisting
- Depth can be set between 1000 mm and 1880 mm from the wall, providing a range of “home positions” ideal for recessed installations
- Both sides (left and right) of the mount adjust independently, compensating for imperfections in the wall
- Walls can be out of alignment by up to 508 mm (horizontally)
- Fine-tune lateral adjustment using turn knobs, protecting screens from potential collisions
- Cord release system remotely pops display out for easy access without pushing the displays and can extend displays out 3400 mm for service.
- Mount must prevent accidental pop out / release of the displays
- Kickstand provides 20 degrees of bottom tilt access
- Landscape display mount option available (LVS1U)
- VESA compatible: 200 x 100 - 800 x 400 mm
- Overall Dimensions (HxWxD): 826 x 495 x 104
- Weight capacity: 68 kg
- Color: Black
- Certifications: UL

THE LVS SERIES



LVS1U
42 - 80" Landscape Mount with Rails



LVS1UP
40 - 80" Portrait Mount with Rails



LVSXU
42 - 80" Landscape Mount without Rails




LVSXUP
40 - 80" Portrait Mount without Rails



TECHNICAL DRAWINGS

Dimensions in mm.

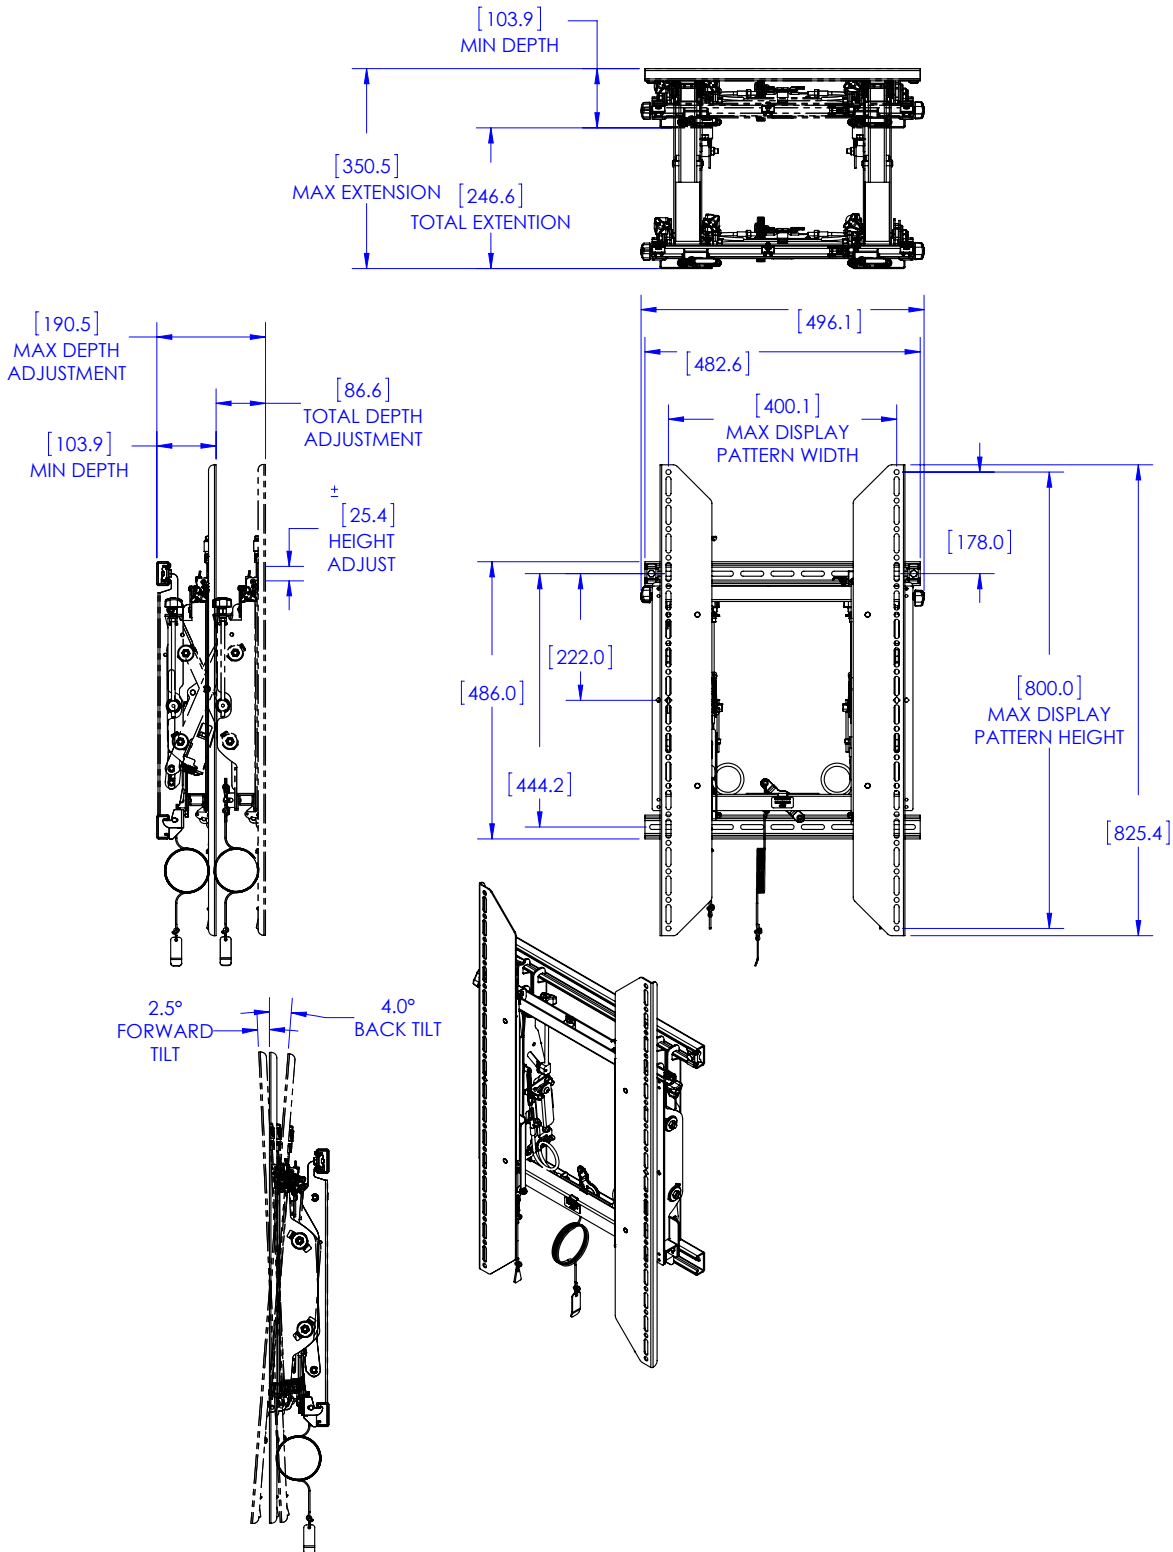

A BRAND OF MILESTONE AV TECHNOLOGIES - www.chiefmfg.com

USA P 800.582.6480 / +1.952.225.6000 - F 877.894.6918 / +1.952.894.6918 - chief@chiefmfg.com
 Canada P 877.345.4329 - F 888.377.5314 - canadainfo@milestone.com
 EMEA P +31 495 580 840 - F +31 495 580 845 - emea.sales@milestone.com
 Asia Pacific P +852 2145 4099 - F +852 2145 4477 - asia.chief@milestone.com

